

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2017-07-10

Ordering Information:

HDGC2523SA-XP - ^{**}/_{1 2}

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0 ,GWT 750°C

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max





Insulation Resistance: 100MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	4.40	9P	20.00	21.90
3P	5.00	6.90	10P	22.50	24.40
4P	7.50	9.40	11P	25.00	26.90
5P	10.00	11.90	12P	27.50	29.40
6P	12.50	14.40	13P	30.00	31.90
7P	15.00	16.90	14P	32.50	34.40
8P	17.50	19.40	15P	35.00	36.90

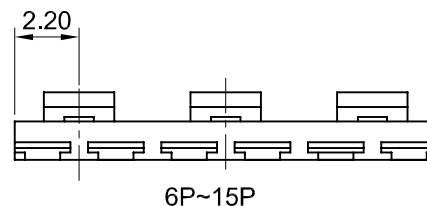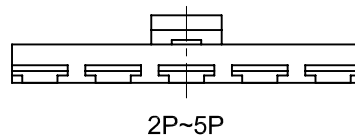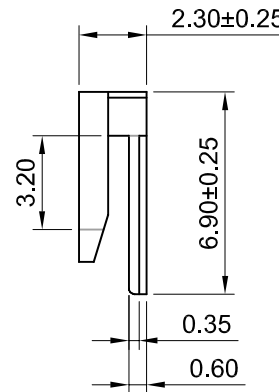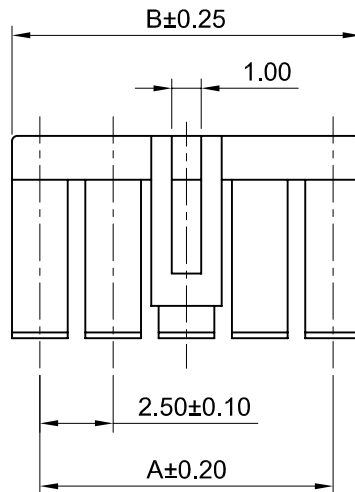

深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称 : 2.50mm Pitch Seal			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: 产品编号 : HDGC2523SA-XP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2017-07-10	4:1	mm	A008