

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2014-07-10

Ordering Information:


HDGC2541WVA-3xXP - * - * - ***
1 2 3 4


1.Part No.
2.Style:
(blank): Type 1
R: Type 2
3.Finish:
(blank): Gold over Nickel
T: Tin over Nickel
4.Material:
(blank): PBT,UL94V-0
6T: Nylon 6T,UL94V-0
GWT: Nylon 6T,UL94V-0,GWT 750°C

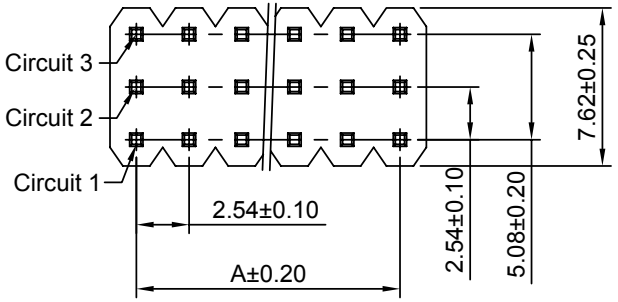

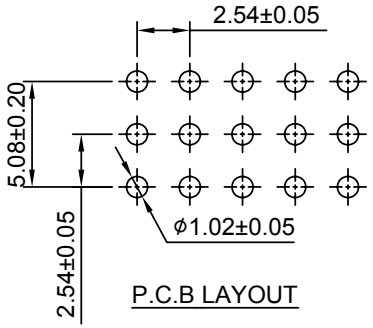


P.C.B LAYOUT

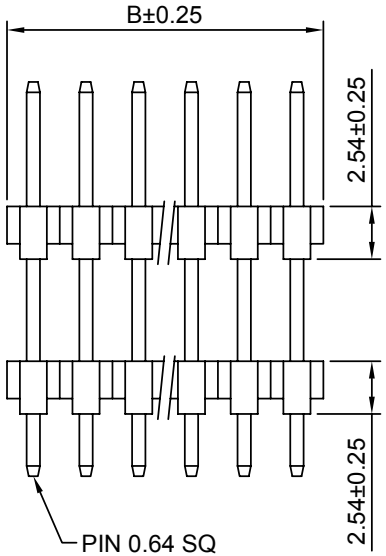

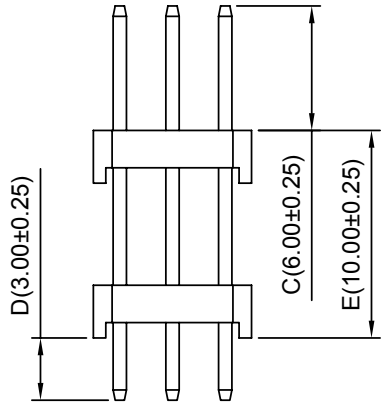

Type 1

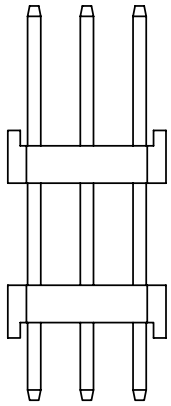

Type 2

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material:Brass/Gold over Nickel
Material:PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dim(mm)		Circuits	Dim(mm)		Circuits	Dim(mm)	
	A	B		A	B		A	B
3x2P	2.54	5.08	3x15P	35.56	38.10	3x28P	68.58	71.12
3x3P	5.08	7.62	3x16P	38.10	40.64	3x29P	71.12	73.66
3x4P	7.62	10.16	3x17P	40.64	43.18	3x30P	73.66	76.20
3x5P	10.16	12.70	3x18P	43.18	45.72	3x31P	76.20	78.74
3x6P	12.70	15.24	3x19P	45.72	48.26	3x32P	78.74	81.28
3x7P	15.24	17.78	3x20P	48.26	50.80	3x33P	81.28	83.82
3x8P	17.78	20.32	3x21P	50.80	53.34	3x34P	83.82	86.36
3x9P	20.32	22.86	3x22P	53.34	55.88	3x35P	86.36	88.90
3x10P	22.86	25.40	3x23P	55.88	58.42	3x36P	88.90	91.44
3x11P	25.40	27.94	3x24P	58.42	60.96	3x37P	91.44	93.98
3x12P	27.94	30.48	3x25P	60.96	63.50	3x38P	93.98	96.52
3x13P	30.48	33.02	3x26P	63.50	66.04	3x39P	96.52	99.06
3x14P	33.02	35.56	3x27P	66.04	68.58	3x40P	99.06	101.60

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表								
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	TITLE: 产品名称：	2.54mm Pitch 180 ° Pin Header	
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	PART NO: 产品编号：	HDGC2541WVA-3xXP	
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	DATE	SCALE	UNIT	CODE NUMBER
						2014-07-10	3:1	mm	A008