

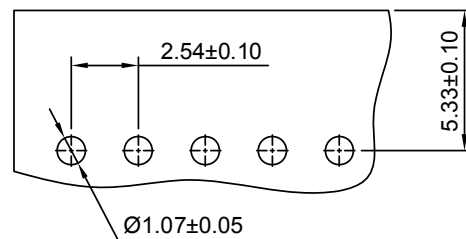
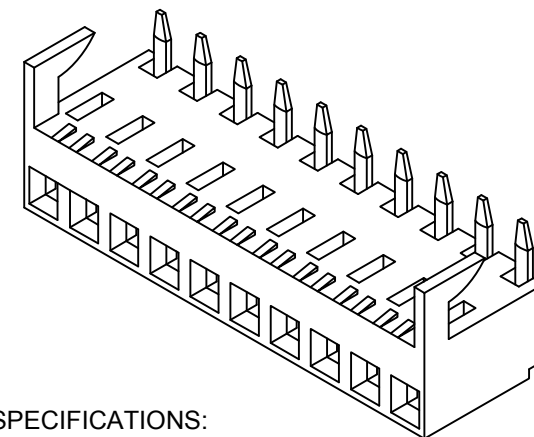
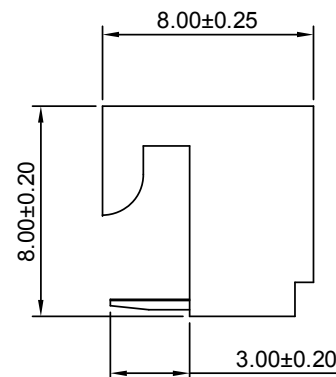


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2012-12-18

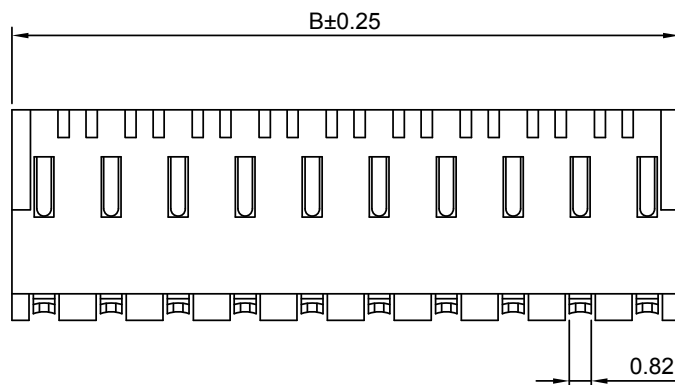

P.C.B LAYOUT

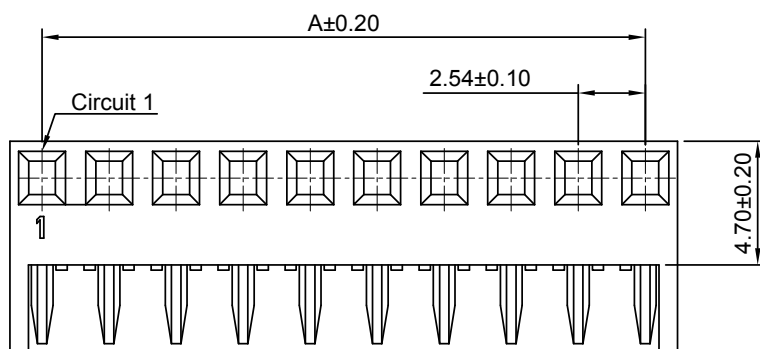

SPECIFICATIONS:

Current Rating: 2.5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	4.98	10P	22.86	25.30
3P	5.08	7.52	11P	25.40	27.84
4P	7.62	10.06	12P	27.94	30.38
5P	10.16	12.60	13P	30.48	32.92
6P	12.70	15.14	14P	33.02	35.46
7P	15.24	17.68	15P	35.56	38.00
8P	17.78	20.22	16P	45.72	48.16
9P	20.32	22.76			



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 2.50mm Pitch Housing	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC2542AW-XP
		DATE	SCALE	UNIT	CODE NUMBER
		2012-12-18	4:1	mm	A008