



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2013-09-29

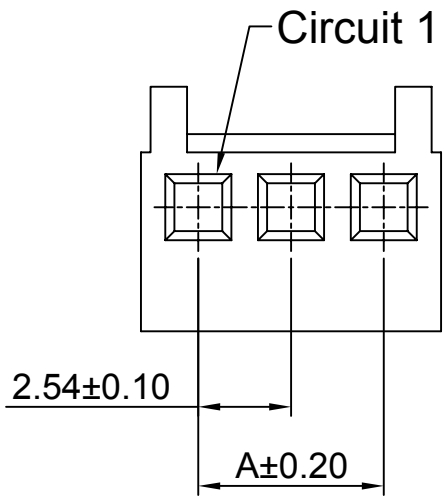

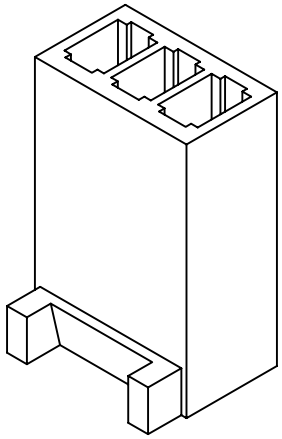

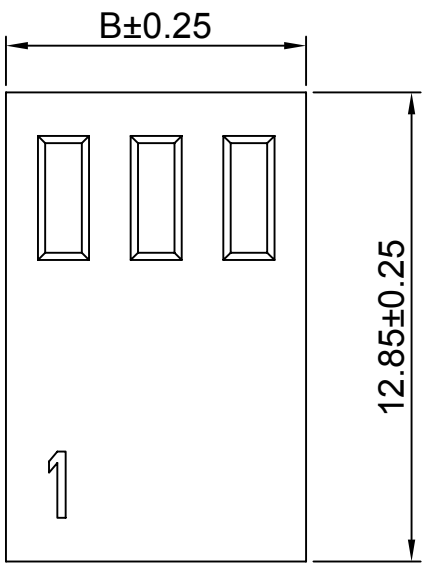

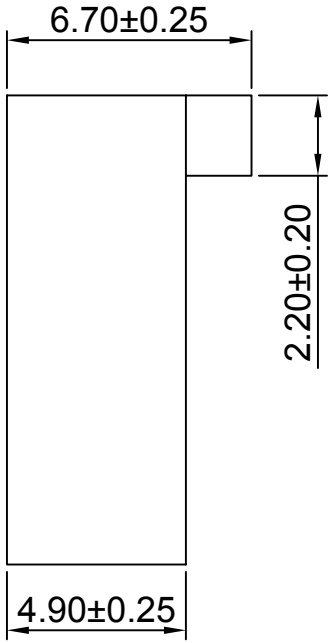

SPECIFICATIONS

Current Rating: 4A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
HDGC2543HA-2P-WH	2.54	5.68
HDGC2543HA-3P-WH	5.08	8.22
HDGC2543HA-4P-WH	7.62	10.76
HDGC2543HA-5P-WH	10.16	13.30
HDGC2543HA-6P-WH	12.70	15.84
HDGC2543HA-7P-WH	15.24	18.38
HDGC2543HA-8P-WH	17.78	20.92
HDGC2543HA-9P-WH	20.32	23.46
HDGC2543HA-10P-WH	22.86	26.00
HDGC2543HA-11P-WH	25.40	28.54
HDGC2543HA-12P-WH	27.94	31.08
HDGC2543HA-13P-WH	30.48	33.62
HDGC2543HA-14P-WH	33.02	36.16
HDGC2543HA-15P-WH	35.56	38.70
HDGC2543HA-16P-WH	38.10	41.24
HDGC2543HA-17P-WH	40.64	43.78
HDGC2543HA-18P-WH	43.18	46.32
HDGC2543HA-19P-WH	45.72	48.86
HDGC2543HA-20P-WH	48.26	51.40

Unit: mm

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	2.54mm Pitch Housing		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC2543HA-XP-WH		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2013-09-29	1:1	mm	A008