

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2013-09-29

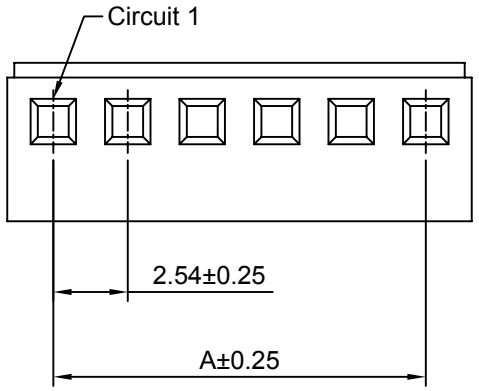

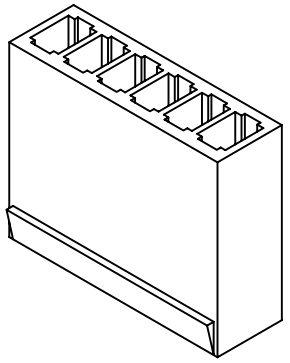


Ordering Information:


HDGC2543HB - **
1 2

1.Part No.
2.Color:
(blank):Brown
WH:White

SPECIFICATIONS:

Current Rating: 4A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0(Brown)

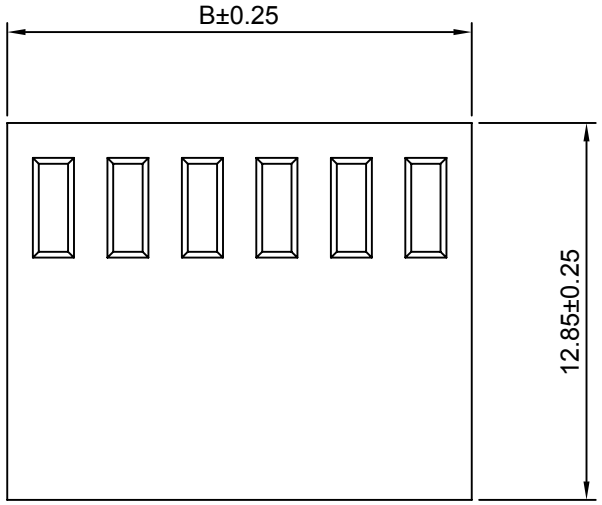

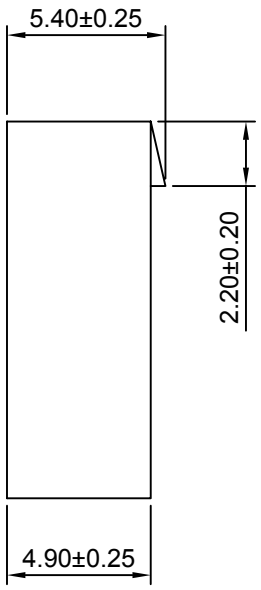

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.68	12P	27.94	31.08
3P	5.08	8.22	13P	30.48	33.62
4P	7.62	10.76	14P	33.02	36.16
5P	10.16	13.30	15P	35.56	38.70
6P	12.70	15.84	16P	38.10	41.24
7P	15.24	18.38	17P	40.64	43.78
8P	17.78	20.92	18P	43.18	46.32
9P	20.32	23.46	19P	45.72	48.86
10P	22.86	26.00	20P	48.26	51.40
11P	25.40	28.54			

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	2.54mm Pitch Housing		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC2543HB-XP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2013-09-29	4:1	mm	A008