

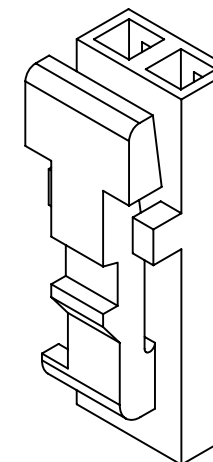
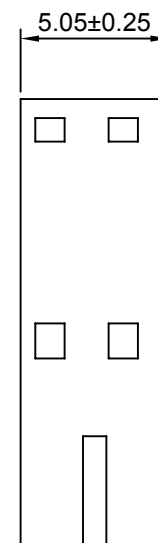
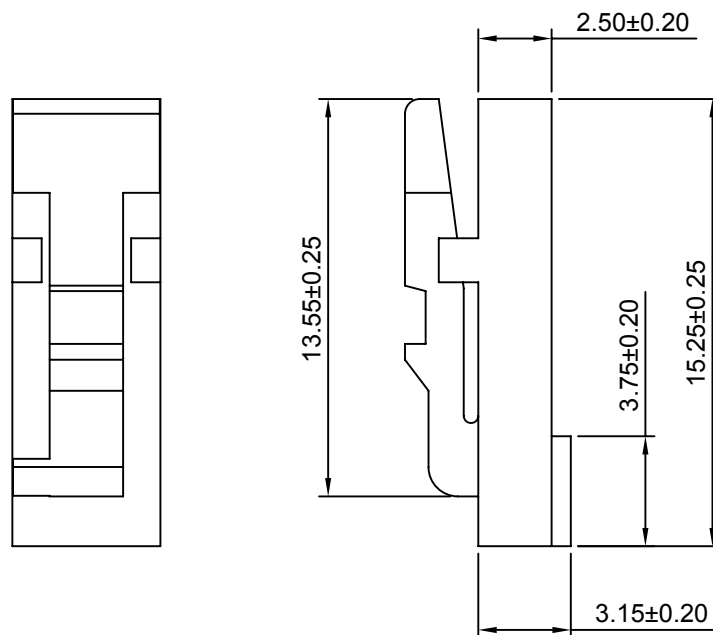


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2013-03-26



SPECIFICATIONS:
Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0 (White)

		深圳市华德共创科技有限公司								
Shenzhen Huade co-create Technology Co.,LTD										
TEL : 0755-27129737					FAX : 0755-29940187					
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称:		2.54mm Pitch Housing		
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE		PART NO: 产品编号:		HDGC2547HC-2P	
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG		DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG		2013-03-26	4:1	mm	A008