



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2014-06-10

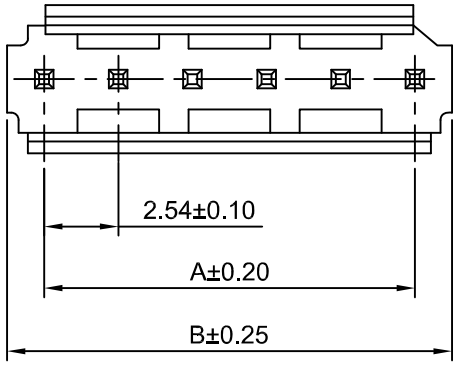



P.C.B LAYOUT

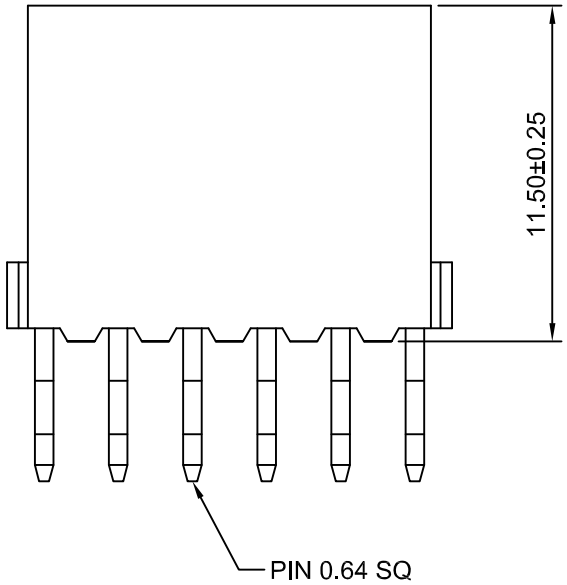


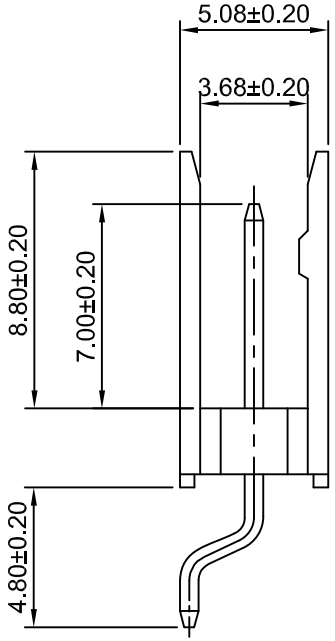

Ordering Information:

HDGC2549WRB-S-XP - * - **
(1) (2) (3)

1.Part No.
2.Color:
(Blank):Blue
BK:Black
3.Plated:
(blank):Tin over Nickel
G : Glold over Nickel



SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66+15%GF,UL94V-0(Blue)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.08	8P	17.78	20.32
3P	5.08	7.62	10P	22.86	25.40
4P	7.62	10.16	12P	27.94	30.48
5P	10.16	12.70	15P	35.56	38.10
6P	12.70	15.24	17P	35.56	43.18
7P	15.24	17.78	18P	35.56	45.72

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	2.54mm Pitch 90° Wafer		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC2549WRB-S-XP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2014-06-10	4:1	mm	A008