


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2019-08-10

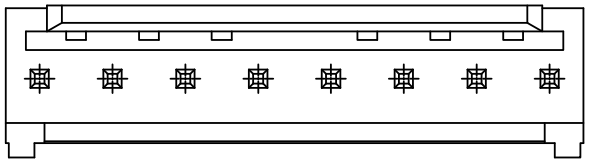


8P~18P

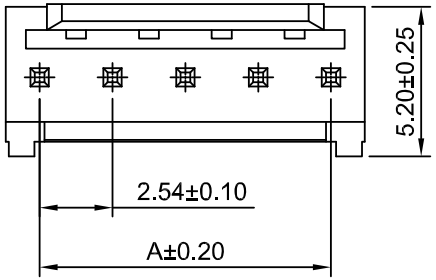

2P~7P

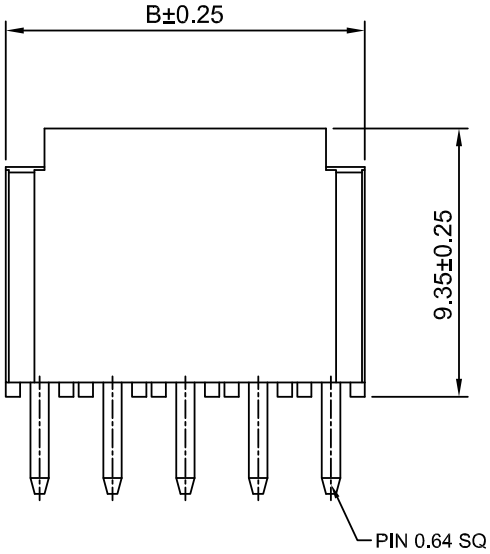


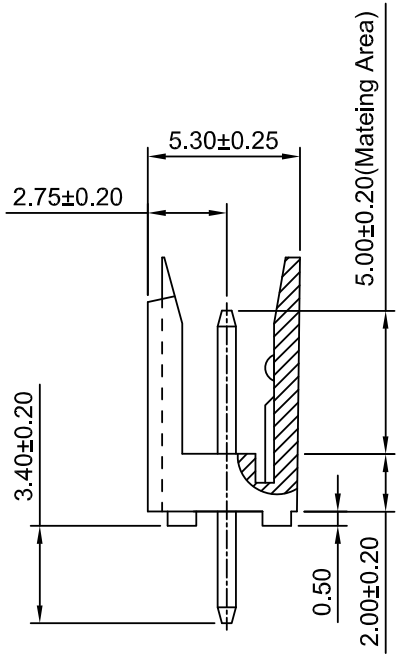

Ordering Information:

HDGC2549WVK-N-XP - ** - ** - ** - **
1 2 3 4 5

1.Part No.
2.Color:
(blank):Blue
BK:Black
3.Finish:
(blank):Tin over Nickel
G:Gold-flash
G30:30μin (0.76μm) MIN.Select Gold(Mating Area)
100μin (2.54μm) MIN.Select Tin
4.Packing:
RE: Tape & Reel
CRE: Tape & Reel with Cap
5.Logo & Marking:
(blank):With Mark
NK:Without Mark

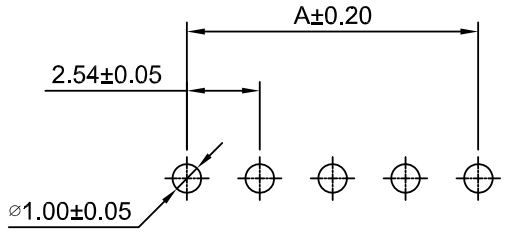

P.C.B LAYOUT

SPECIFICATIONS:
Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66+30%G.F,UL94V-0 (Blue)
Suitable for reflow soldering : 265°C/10s

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	4.90	11P	25.40	27.76
3P	5.08	7.44	12P	27.94	30.30
4P	7.62	9.98	13P	30.48	32.84
5P	10.16	12.52	14P	33.02	35.38
6P	12.70	15.06	15P	35.56	37.92
7P	15.24	17.60	16P	38.10	40.46
8P	17.78	20.14	17P	40.64	43.00
9P	20.32	22.68	18P	43.18	45.54
10P	22.86	25.22			

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	2.54mm Pitch 180° Wafer		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC2549WVK-N-XP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2019-08-10	4:1	mm	A008