


| 修订 REV | 标记 MARK | 修改摘要 REVISION DESCRIPTION | 签名 SIGNA TURE | 日期 DATE |
|---|---|---|---|---|
| A0 | | NEW RELEEASE | WANG | 2019-08-10 |
| | | | | |

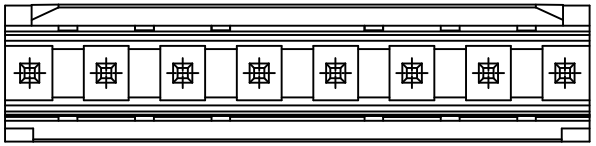


8P~18P

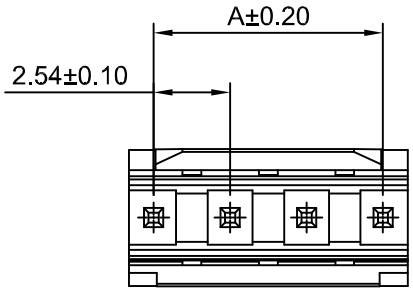


2P~7P

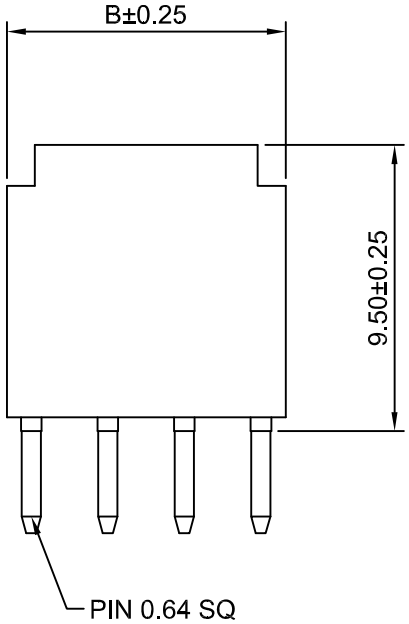


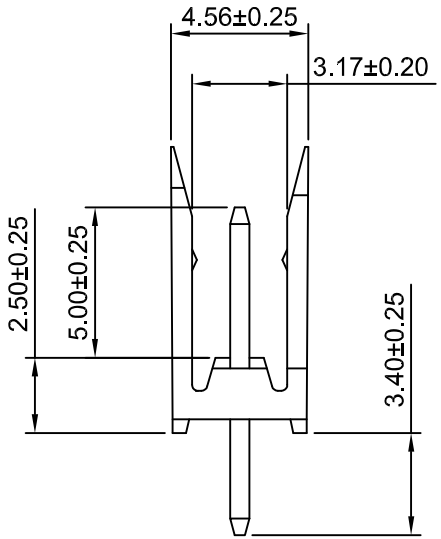
Ordering Information:

HDGC2549WVK-XP - ** - ** - ** - **
1 2 3 4 5

1.Part No.
2.Color:
(blank):Blue
BK:Black
3.Finish:
(blank):Tin over Nickel
G:Gold-flash
G30:30μin (0.76μm) MIN.Select Gold(Mating Area)
100μin (2.54μm) MIN.Select Tin
4.Packing:
RE: Tape & Reel
CRE: Tape & Reel with Cap
5.Logo & Marking:
(blank):With Mark
NK:Without Mark

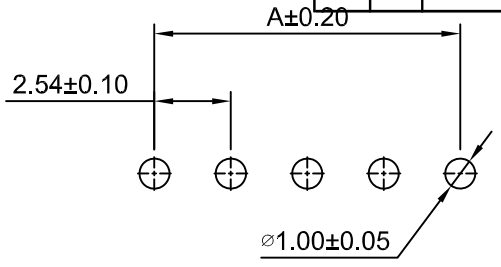


P.C.B LAYOUT

SPECIFICATIONS:
Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0 (Blue)

Ordering Information & Dimensions

| Circuits | Dimensions(mm) | | Circuits | Dimensions(mm) | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 2P | 2.54 | 4.18 | 11P | 25.40 | 27.04 |
| 3P | 5.08 | 6.72 | 12P | 27.94 | 29.58 |
| 4P | 7.62 | 9.26 | 13P | 30.48 | 32.12 |
| 5P | 10.16 | 11.80 | 14P | 33.02 | 34.66 |
| 6P | 12.70 | 14.34 | 15P | 35.56 | 37.20 |
| 7P | 15.24 | 16.88 | 16P | 38.10 | 39.74 |
| 8P | 17.78 | 19.42 | 17P | 40.64 | 42.28 |
| 9P | 20.32 | 21.96 | 18P | 43.18 | 44.82 |
| 10P | 22.86 | 24.50 | | | |

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL：0755-27129737 FAX：0755-29940187

| -TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表 | | | | | | TITLE: 产品名称： | 2.54mm Pitch 180° Wafer | | |
|---|---|---|---|---|---|---|---|---|---|
| X.X | ±0.30 | X.X° | ±3° | APPD: 核准： | XIE | PART NO: 产品编号： | HDGC2549WVK-XP | | |
| X.XX | ±0.30 | X.XX° | ±2° | CHECK: 校对： | WANG | DATE | SCALE | UNIT | CODE NUMBER |
| X.XXX | ±0.10 | X.XXX° | ±1° | DRAW: 绘图： | WANG | 2019-08-10 | 4:1 | mm | A008 |