


| 修订 REV | 标记 MARK | 修改摘要 REVISION DESCRIPTION | 签名 SIGNA TURE | 日期 DATE |
|---|---|---|---|---|
| A0 | | NEW RELEEASE | WANG | 2017-05-10 |
| | | | | |

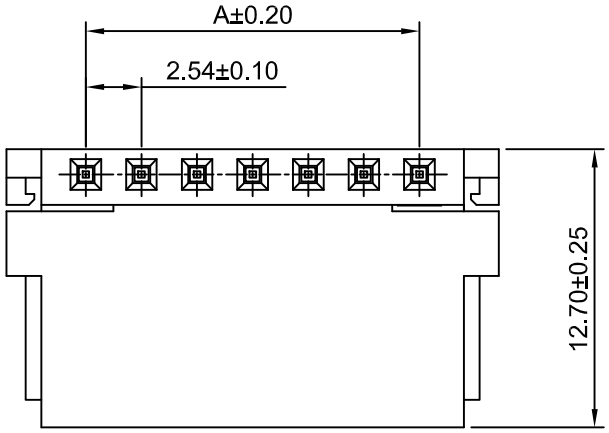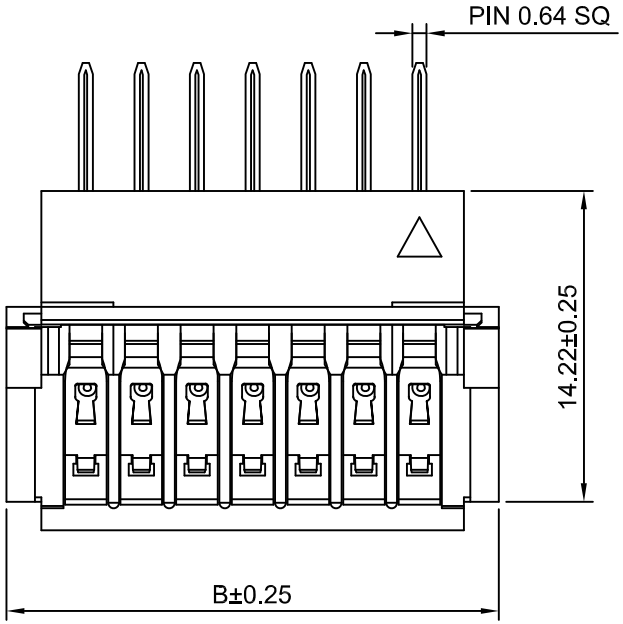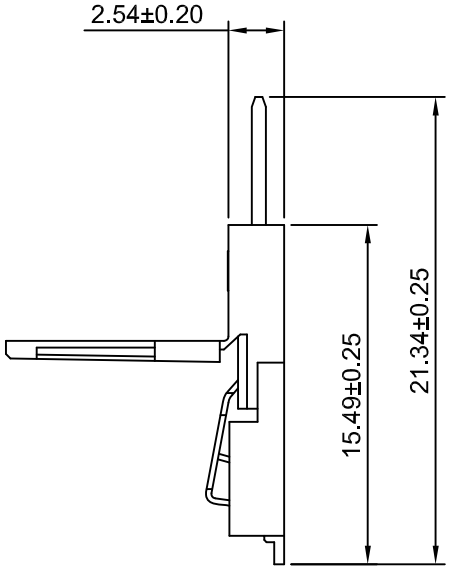


## Ordering Information:

HDGC2550HDM-XP - *
1 2

1.Part No.
2.Finish
(blank) :Tin over Nickel
G :Gold over Nickel

## SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1100V AC/minute
Terminal Material:Phosphor Bronze/Tin over Nickel
Material: PP,UL94V-0(Blue)

Ordering Information & Dimensions

| Circuits | Dimensions(mm) | | Circuits | Dimensions(mm) | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 2P | 2.54 | 9.91 | 20P | 48.26 | 55.63 |
| 3P | 5.08 | 12.45 | 21P | 50.80 | 58.17 |
| 4P | 7.62 | 14.99 | 22P | 53.34 | 60.71 |
| 5P | 10.16 | 17.53 | 23P | 55.88 | 63.25 |
| 6P | 12.70 | 20.07 | 24P | 58.42 | 65.79 |
| 7P | 15.24 | 22.61 | 25P | 60.96 | 68.33 |
| 8P | 17.78 | 25.15 | 26P | 63.50 | 70.87 |
| 9P | 20.32 | 27.69 | 27P | 66.04 | 73.41 |
| 10P | 22.86 | 30.23 | 28P | 68.58 | 75.95 |
| 11P | 25.40 | 32.77 | 29P | 71.12 | 78.49 |
| 12P | 27.94 | 35.31 | 30P | 73.66 | 81.03 |
| 13P | 30.48 | 37.85 | 31P | 76.20 | 83.57 |
| 14P | 33.02 | 40.39 | 32P | 78.74 | 86.11 |
| 15P | 35.56 | 42.93 | 33P | 81.28 | 88.65 |
| 16P | 38.10 | 45.47 | 34P | 83.82 | 91.19 |
| 17P | 40.64 | 48.01 | 35P | 86.36 | 93.73 |
| 18P | 43.18 | 50.55 | 36P | 88.90 | 96.27 |
| 19P | 45.72 | 53.09 | | | |


深圳市华德共创科技有限公司
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD
TEL：0755-27129737 FAX：0755-29940187


| -TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表 | | | | | | TITLE: 产品名称： | 2.54mm Pitch Housing | | |
|---|---|---|---|---|---|---|---|---|---|
| X.X | ±0.30 | X.X° | ±3° | APPD: 核准： | XIE | PART NO: 产品编号： | HDGC2550HDM-XP | | |
| X.XX | ±0.30 | X.XX° | ±2° | CHECK: 校对： | WANG | DATE | SCALE | UNIT | CODE NUMBER |
| X.XXX | ±0.10 | X.XXX° | ±1° | DRAW: 绘图： | WANG | 2017-05-10 | 3:1 | mm | A008 |