


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2015-07-12

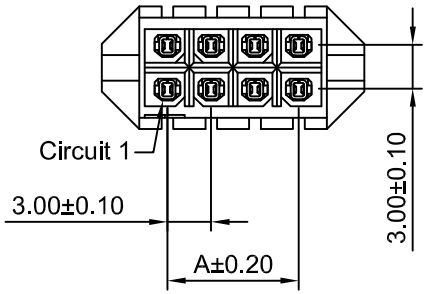


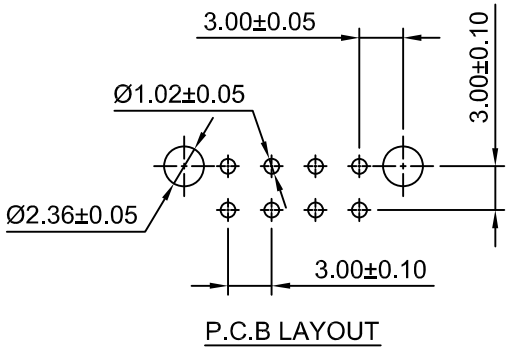


P.C.B LAYOUT

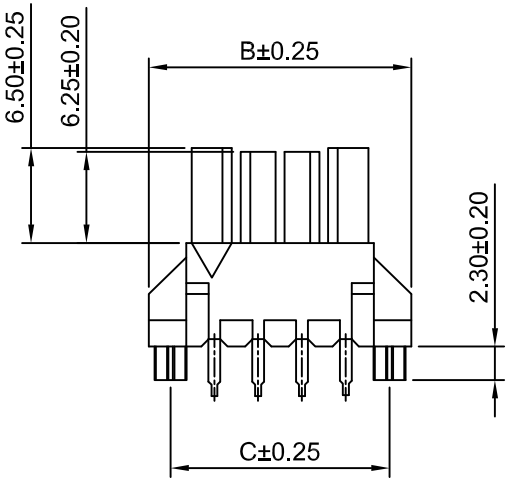

2x3～2x12P



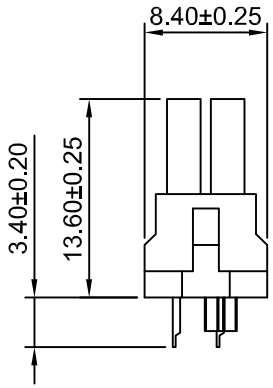


2x2P

Ordering Information:

HDGC3030HFWV-2xXP - ** - **
1 2 3

1.Part No.
2.Material:
(blank):LCP UL94V-0
GWT:LCP UL94V-0,GWT 750°C
3.Finish:
(blank):Tin over Nickel
G:Gold over Nickel(1"U)
G3:Gold over Nickel(3"U)
G15:Gold over Nickel(15"U)
G30:Gold over Nickel(30"U)



SPECIFICATIONS:

Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

CIrcults	Dimensions(mm)		
	A	B	C
2x2P	3.00	12.00	9.00
2x3P	6.00	15.00	12.00
2x4P	9.00	18.00	15.00
2x5P	12.00	21.00	18.00
2x6P	15.00	24.00	21.00
2x7P	18.00	27.00	24.00

CIrcults	Dimensions(mm)		
	A	B	C
2x8P	21.00	30.00	27.00
2x9P	24.00	33.00	30.00
2x10P	27.00	36.00	33.00
2x11P	30.00	39.00	36.00
2x12P	33.00	42.00	39.00

深圳市华德共创科技有限公司
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	3.00mm Pitch 180° Wafer		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC3030HFWV-2xXP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2015-07-12	2:1	mm	A008