

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2015-07-12

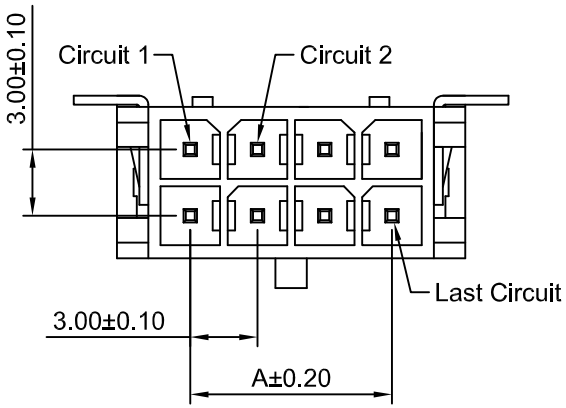

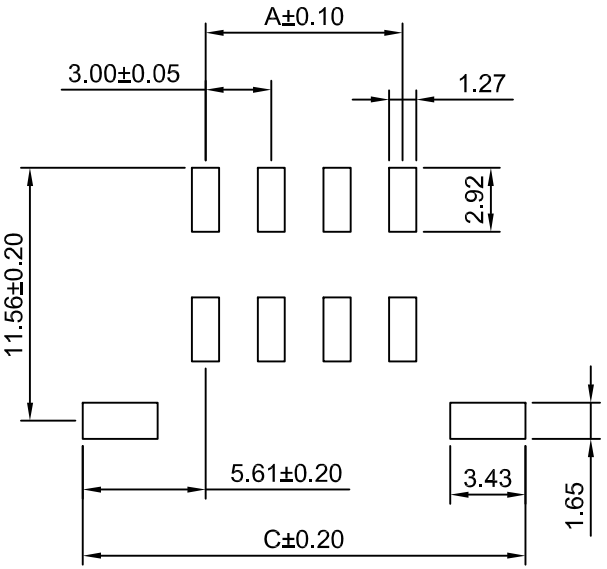


P.C.B LAYOUT

Ordering Information:


HDGC3030WR-S-2xXP - ** - **
1 2 3


1.Part No.
2.Material:
(blank):LCP UL94V-0
GWT:LCP UL94V-0,GWT 750°C
3.Finish:
(blank):Tin over Nickel
G:Gold over Nickel(1"U)
G3:Gold over Nickel(3"U)
G15:Gold over Nickel(15"U)
G30:Gold over Nickel(30"U)



SPECIFICATIONS:

Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: LCP,UL94V-0(Black)

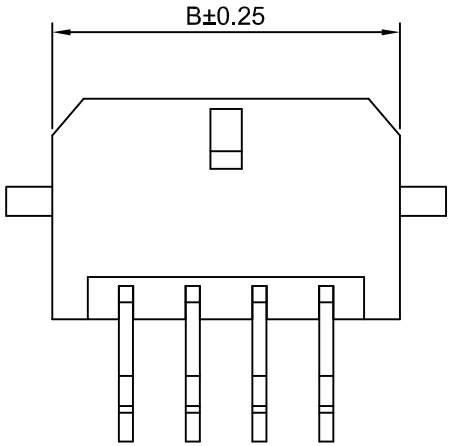

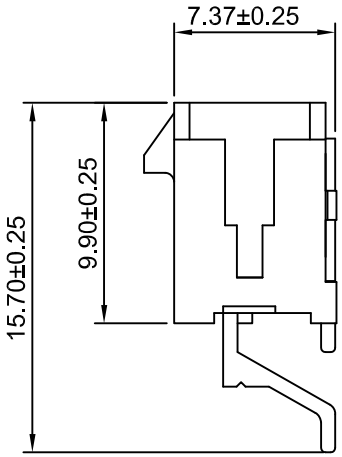

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x1P	---	6.65	11.20	2x7P	18.00	24.65	29.20
2x2P	3.00	9.65	14.20	2x8P	21.00	27.65	32.20
2x3P	6.00	12.65	17.20	2x9P	24.00	30.65	35.20
2x4P	9.00	15.65	20.20	2x10P	27.00	33.65	38.20
2x5P	12.00	18.65	23.20	2x11P	30.00	36.65	41.20
2x6P	15.00	21.65	26.20	2x12P	33.00	39.65	44.20

深圳市华德共创科技有限公司
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	3.00mm Pitch 90° Wafer		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC3030WR-S-2xXP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2015-07-12	3:1	mm	A008