

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2015-07-12

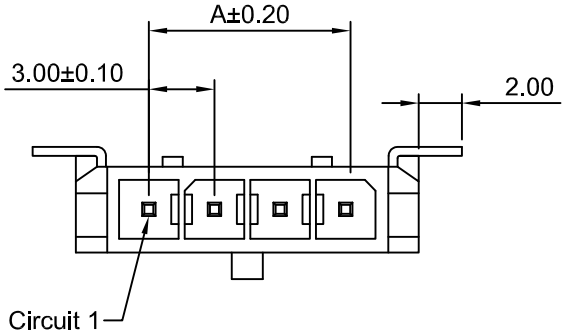

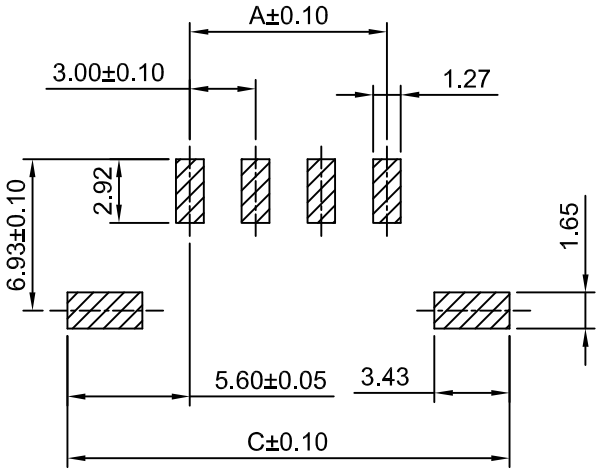


P.C.B LAYOUT

Ordering Information:


HDGC3030WR-S-XP - ** - **
1 2 3


1.Part No.
2.Materlal:
(blank):LCP UL94V-0
GWT:LCP UL94V-0,GWT 750°C
3.Finish:
(blank):Tin over Nickel
G:Gold over Nickel(1"U)
G3:Gold over Nickel(3"U)
G15:Gold over Nickel(15"U)
G30:Gold over Nickel(30"U)



SPECIFICATIONS:

Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: LCP,UL94V-0(Black)

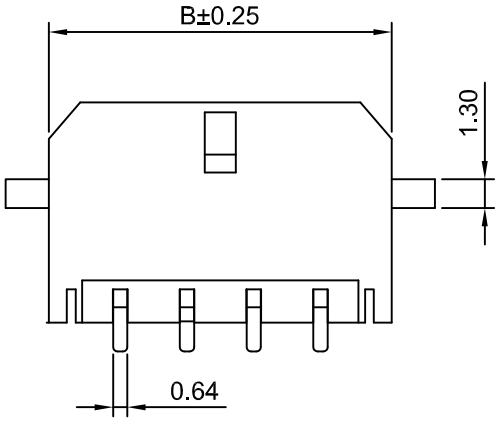

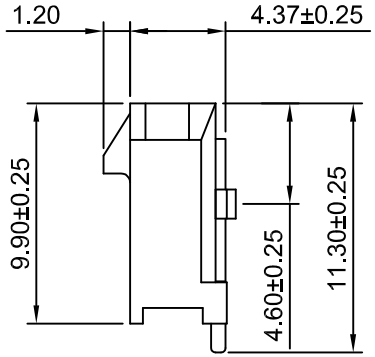

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	3.00	9.65	14.20	8P	21.00	27.65	32.20
3P	6.00	12.65	17.20	9P	24.00	30.65	35.20
4P	9.00	15.65	20.20	10P	27.00	33.65	38.20
5P	12.00	18.65	23.20	11P	30.00	36.65	41.20
6P	15.00	21.65	26.20	12P	33.00	39.65	44.20
7P	18.00	24.65	29.20				

深圳市华德共创科技有限公司
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	3.00mm Pitch 90° Wafer		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC3030WR-S-XP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2015-07-12	3:1	mm	A008