


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2015-07-12

Ordering Information:
 HDGC3030WR-XP - $\frac{**}{1} - \frac{**}{2} - \frac{**}{3}$

- Part No.
- Material:
 (blank):Nylon 66 UL94V-0
 LCP:LCP UL94V-0
 GWT:Nylon 66 UL94V-0,GWT 750°C
- Finish:
 (blank):Tin over Nickel
 G:Gold over Nickel(1"U)
 G3:Gold over Nickel(3"U)
 G15:Gold over Nickel(15"U)
 G30:Gold over Nickel(30"U)



SPECIFICATIONS:
 Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material:Brass/Tin over Nickel
 Material: Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.00	9.65	8P	21.00	27.65
3P	6.00	12.65	9P	24.00	30.65
4P	9.00	15.65	10P	27.00	33.65
5P	12.00	18.65	11P	30.00	36.65
6P	15.00	21.65	12P	33.00	39.65
7P	18.00	24.65			





深圳市华德共创科技有限公司



SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 3.00mm Pitch 90° Wafer	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC3030WR-XP
				DATE	SCALE
				UNIT	CODE NUMBER
				2015-07-12	2:1 mm A008

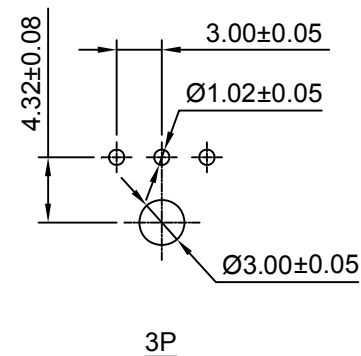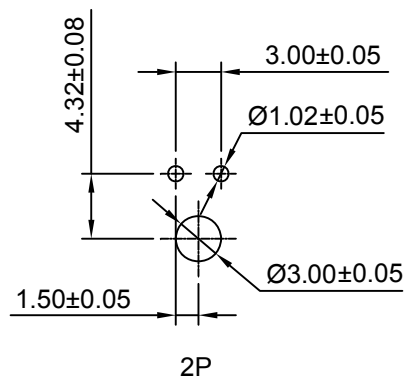

P.C.B LAYOUT

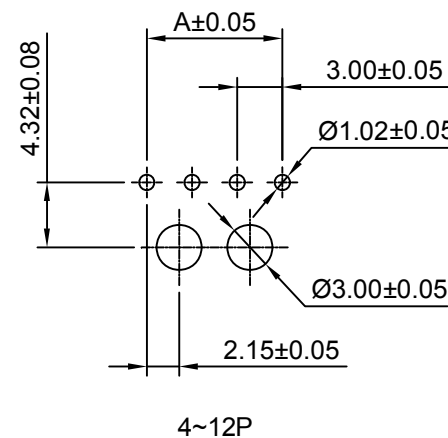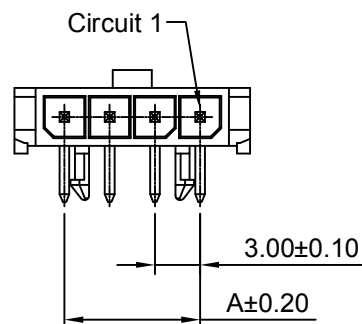

P.C.B LAYOUT

