

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2015-07-12

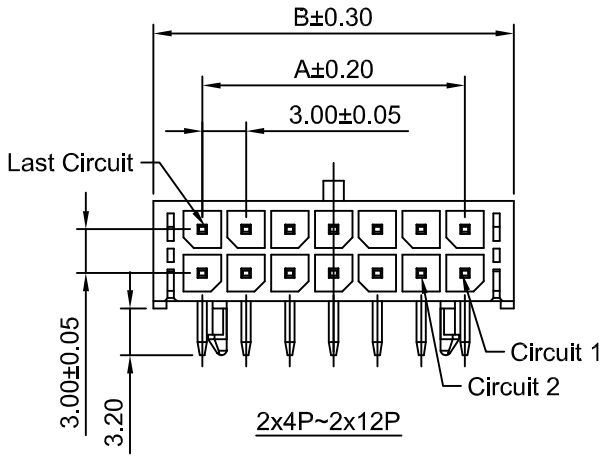

2x4P~2x12P





2x1P~2x3P


Ordering Information:


HDGC3030WRA-F1-2xXP - **
1 2

1.Part No.
2.Finish:
(blank):Tin over Nickel
G:Gold-flash
G15:15μin (0.38μm) MIN.Select Gold
100μin (2.54μm) MIN.Select Tin
G30:30μin (0.76μm) MIN.Select Gold
100μin (2.54μm) MIN.Select Tin




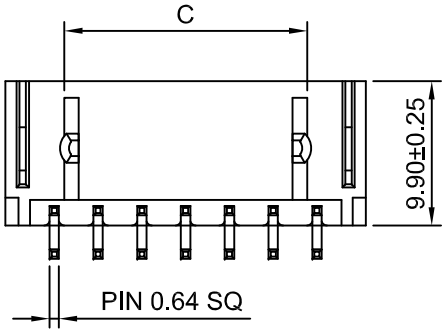

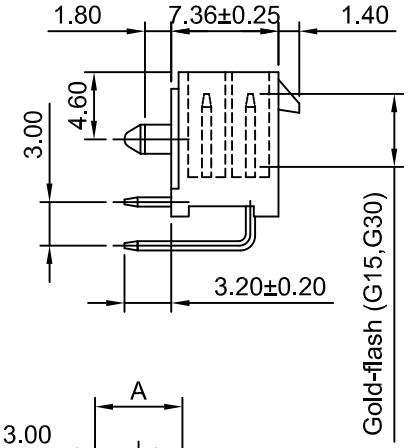

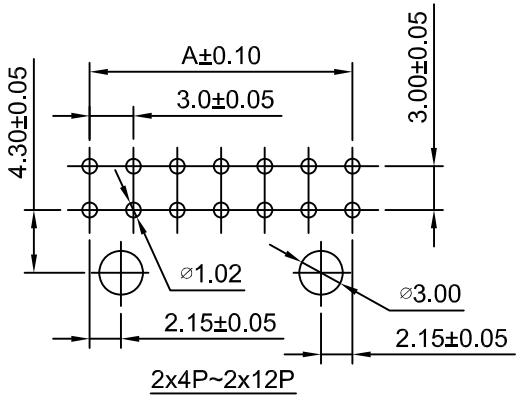

2x4P~2x12P



2x1P~2x3P

P.C.B LAYOUT

SPECIFICATIONS:

Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material:Nylon 46,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x1P	---	6.70	2.90	2x7P	18.00	24.70	16.60
2x2P	3.00	9.70	2.90	2x8P	21.00	27.70	19.60
2x3P	6.00	12.70	2.90	2x9P	24.00	30.70	22.60
2x4P	9.00	15.70	7.60	2x10P	27.00	33.70	25.60
2x5P	12.00	18.70	10.60	2x11P	30.00	36.70	28.60
2x6P	15.00	21.70	13.60	2x12P	33.00	39.70	31.60

深圳市华德共创科技有限公司
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	3.00mm Pitch 90° Wafer		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC3030WRA-F1-2xXP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2015-07-12	2:1	mm	A008