

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2017-07-22

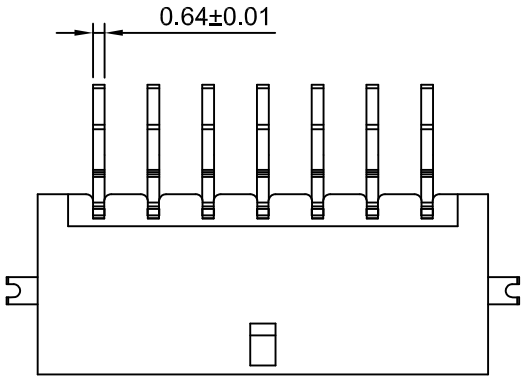

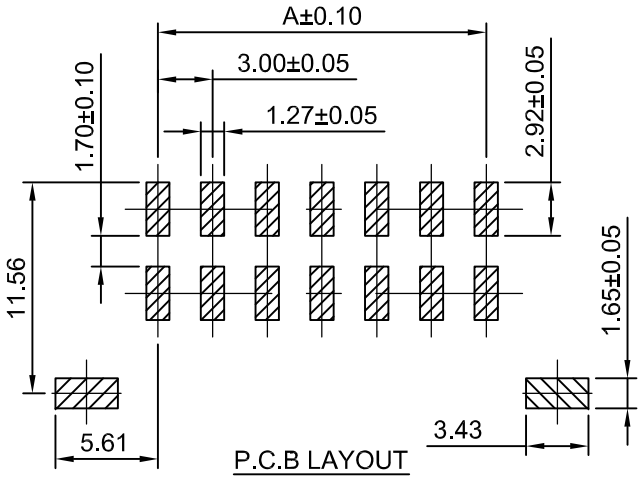



P.C.B LAYOUT


Ordering Information:

HDGC3030WRA-S-2xXP - **
1 2

1.Part No.
2.Finish:
(blank):Tin over Nickel
G:Gold-flash
G15:15μin (0.38μm) MIN.Select Gold
100μin (2.54μm) MIN.Select Tin
G30:30μin (0.76μm) MIN.Select Gold
100μin (2.54μm) MIN.Select Tin

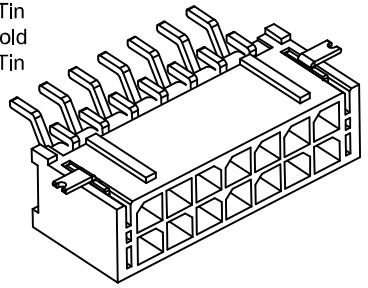

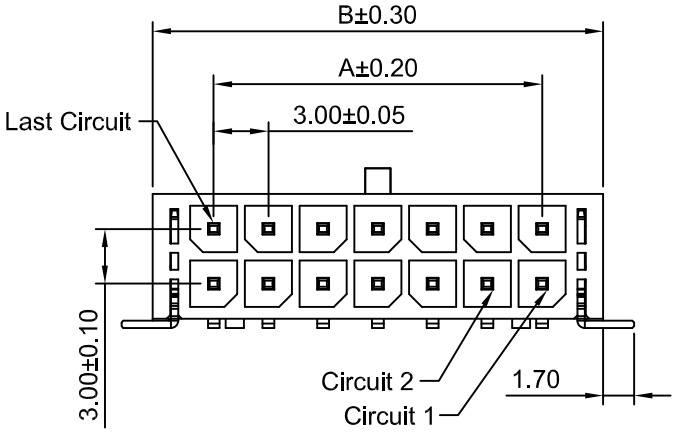

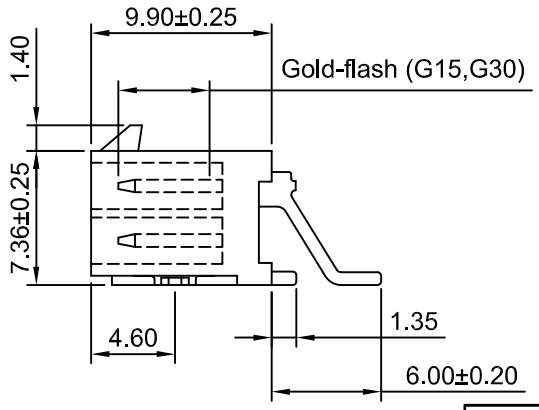

SPECIFICATIONS:

Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material:Nylon 46,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
2x1P	---	6.70
2x2P	3.00	9.70
2x3P	6.00	12.70
2x4P	9.00	15.70
2x5P	12.00	18.70
2x6P	15.00	21.70

Circuits	Dimensions(mm)	
	A	B
2x7P	18.00	24.70
2x8P	21.00	27.70
2x9P	24.00	30.70
2x10P	27.00	33.70
2x11P	30.00	36.70
2x12P	33.00	39.70

深圳市华德共创科技有限公司
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	3.00mm Pitch 90° Wafer		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC3030WRA-S-2xXP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2017-07-22	2.5:1	mm	A008