
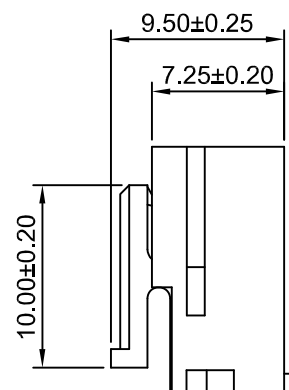
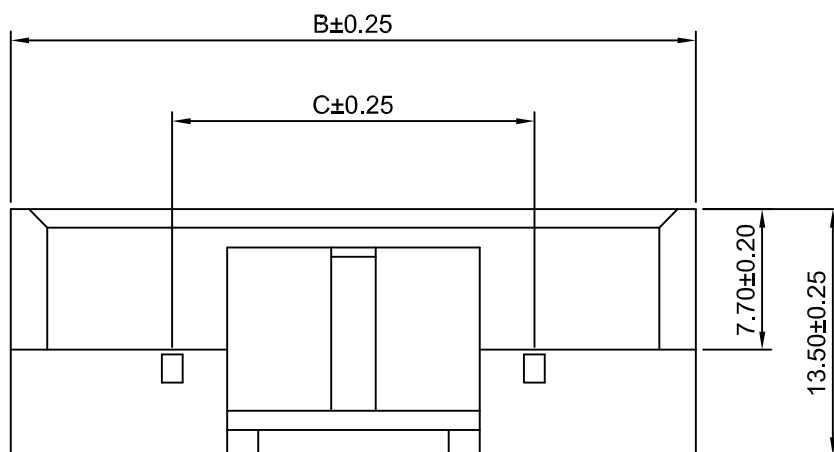



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2017-08-25

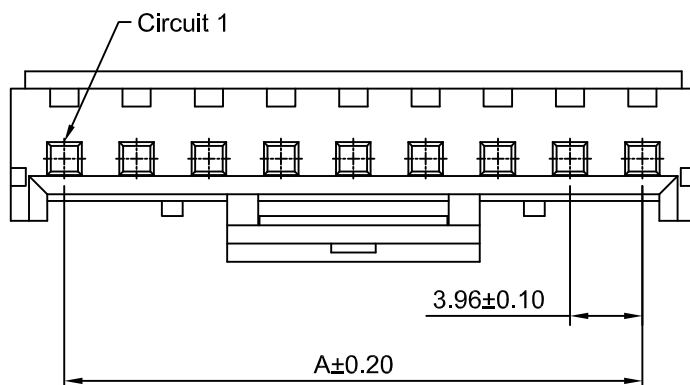

SPECIFICATIONS:

Current Rating: 10A AC, DC (AWG #16)

Voltage Rating: 250V AC, DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66, UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	3.96	9.63	-----	9P	31.68	37.35	19.80
3P	7.92	13.59	-----	10P	35.64	41.31	19.80
4P	11.88	17.55	-----	11P	39.60	45.27	27.72
5P	15.84	21.51	-----	12P	43.56	49.23	27.72
6P	19.80	25.47	-----	13P	47.52	53.19	27.72
7P	23.76	29.43	19.80	14P	51.48	57.15	27.72
8P	27.72	33.39	19.80	15P	55.44	61.11	27.72



深圳市华德共创科技有限公司

SHENZHEN HUADE CO-CREATE TECHNOLOGY CO., LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 3.96mm Pitch Housing	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC3963HC-XP
				DATE	2017-08-25
				SCALE	2.5:1
				UNIT	mm
				CODE NUMBER	A008