

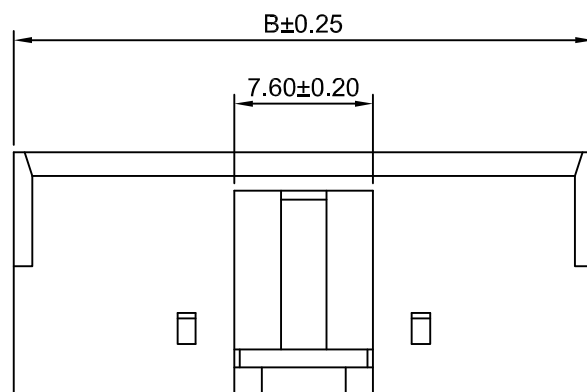


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2017-08-25

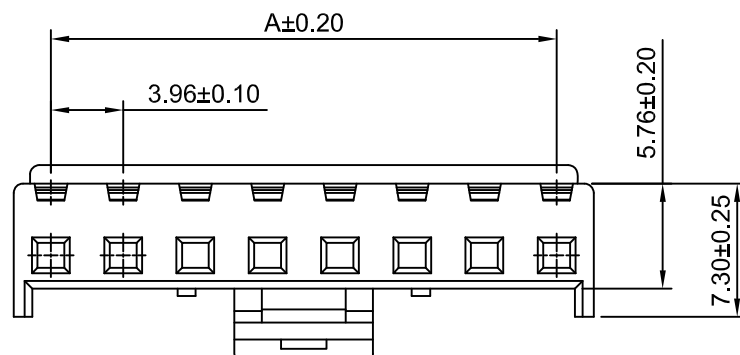

4P~8P



SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max


Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute


Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	8.02	9P	31.68	35.74
3P	7.92	11.98	10P	35.64	39.70
4P	11.88	15.94	11P	39.60	43.66
5P	15.84	19.90	12P	43.56	47.62
6P	19.80	23.86	13P	47.52	51.58
7P	23.76	27.82	14P	51.48	55.54
8P	27.72	31.78	15P	55.44	59.50

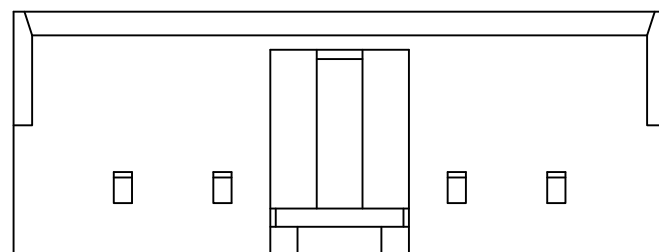

9P~15P

		深圳市华德共创科技有限公司								
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD						TEL : 0755-27129737		FAX : 0755-29940187		
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 产品名称:		3.96mm Pitch Housing			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE		PART NO: 产品编号:		HDGC3963HD-XP	
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG		DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG		2017-08-25	2.5:1	mm	A008