


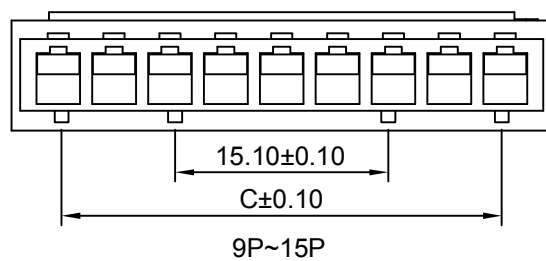
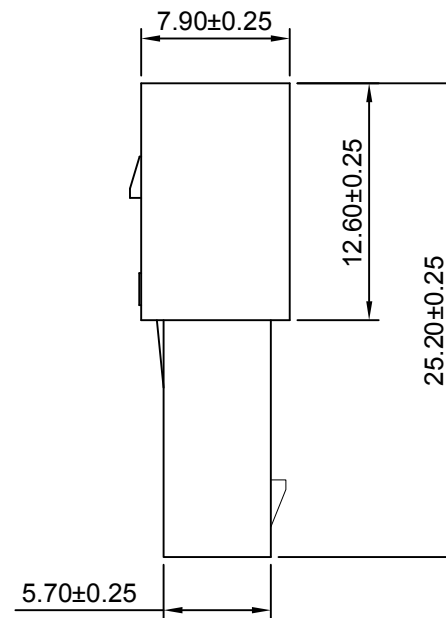
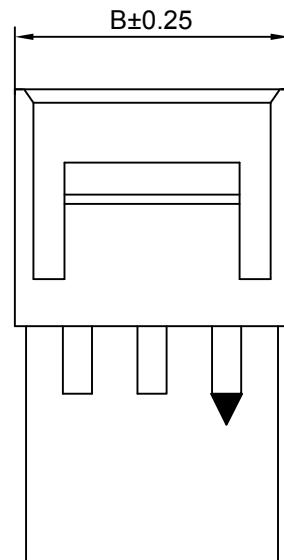
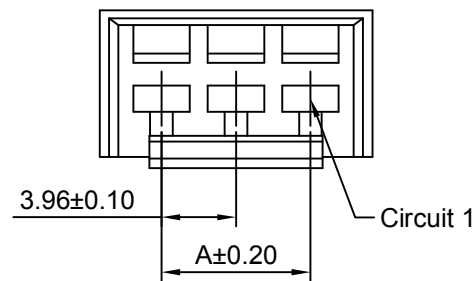


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2017-08-25

Ordering Information:
 HDGC3963HMA-XP - $\frac{**}{2}$ - $\frac{**}{3}$

- Part No.
- Color:
 (Blank):White
 RD:Red
 YL:Yellow
 BL:Blue
 BK:Black
 GN:Green
- Material:
 (Blank):Nylon 66,UL94V-0
 GWT:Nylon 66,UL94V-0,GWT 750°C

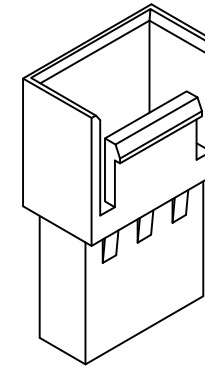

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	3.96	10.64	---	9P	31.68	38.36	31.20
3P	7.92	14.60	7.44	10P	35.64	42.32	35.16
4P	11.88	18.56	11.40	11P	39.60	46.28	39.12
5P	15.84	22.52	15.36	12P	43.56	50.24	43.08
6P	19.80	26.48	19.32	13P	47.52	54.20	47.04
7P	23.76	30.44	23.28	14P	51.48	58.16	51.00
8P	27.72	34.40	27.24	15P	55.44	62.12	54.96



深圳市华德共创科技有限公司

SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

UNLESS -TOLERANCES- OTHERWISE SPECIFIED 公差参数表					TITLE: 3.96mm Pitch 产品名称: Housing			
X.X	±0.30	X.X° ±3°	APPD: 核准: XIE	PART NO: 产品编号: HDGC3963HMA-XP				
X.XX	±0.30	X.XX° ±2°	CHECK: 校对: WANG	DATE	SCALE	UNIT	CODE NUMBER	
X.XXX	±0.10	X.XXX° ±1°	DRAW: 绘图: WANG	2017-08-25	2.5:1	mm	A008	