
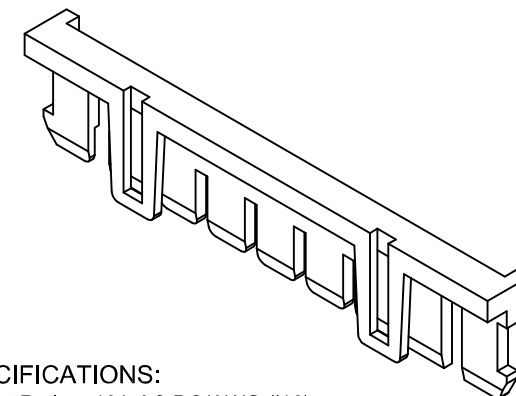
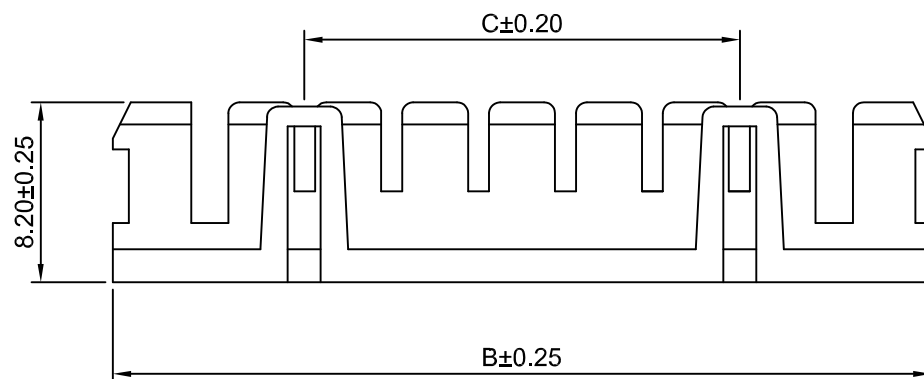
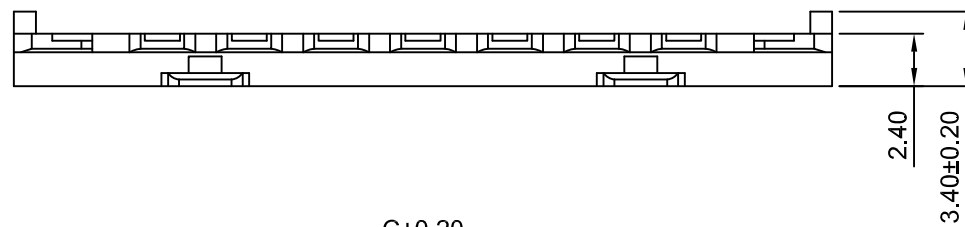


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2013-09-10

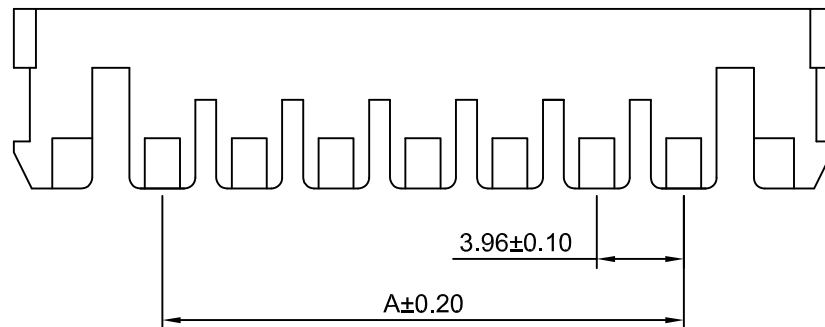

SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(Red)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	-----	9.58	-----	9P	23.76	37.30	19.80
3P	-----	13.54	-----	10P	27.72	41.26	19.80
4P	3.96	17.50	-----	11P	31.68	45.22	27.72
5P	7.92	21.46	-----	12P	35.64	49.18	27.72
6P	11.88	25.42	-----	13P	39.60	53.14	27.72
7P	15.84	29.38	19.80	14P	43.56	57.10	27.72
8P	19.80	33.34	19.80	15P	47.52	61.06	27.72



深圳市华德共创科技有限公司

SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 3.96mm Pitch 产品名称: Interface Seal			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: HDGC3963S-XP 产品编号:			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2013-09-10	3:1	mm	A008