




修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2013-09-10

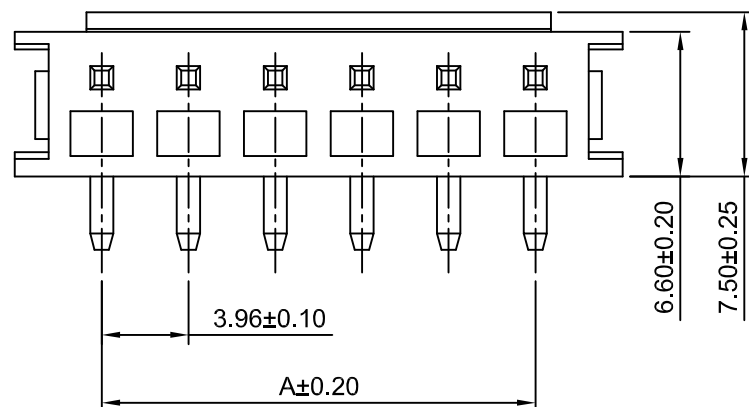

P.C.B LAYOUT


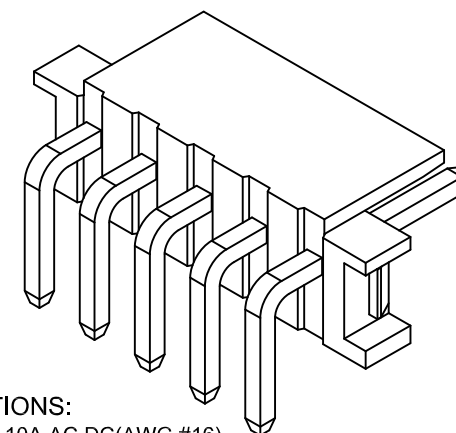


SPECIFICATIONS:


Current Rating: 10A AC,DC(AWG #16)
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	11.92	9P	31.68	39.64
3P	7.92	15.88	10P	35.64	43.60
4P	11.88	19.84	11P	39.60	47.56
5P	15.84	23.80	12P	43.56	51.52
6P	19.80	27.76	13P	47.52	55.48
7P	23.76	31.72	14P	51.48	59.44
8P	27.72	35.68	15P	55.44	63.40

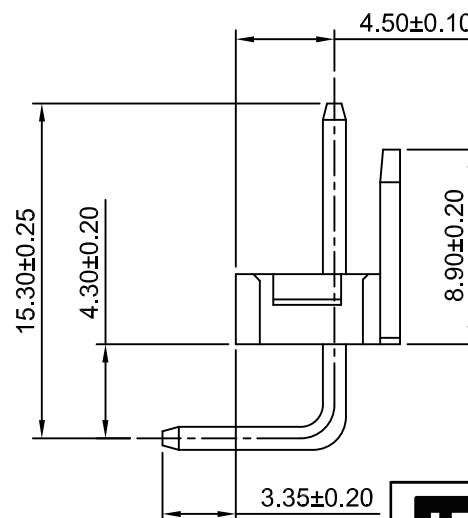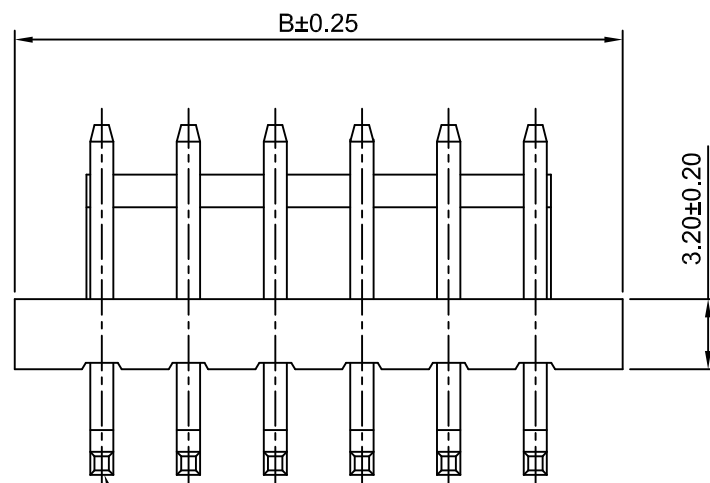

Circuit 1
PIN 1.14 SQ

		深圳市华德共创科技有限公司									
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD											
TEL : 0755-27129737				FAX : 0755-29940187							
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 3.96mm Pitch 产品名称: 90° Wafer						
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE			PART NO: 产品编号:	HDGC3963WRB-XP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG			DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG			2013-09-10	3:1	mm	A008