




修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2015-05-25

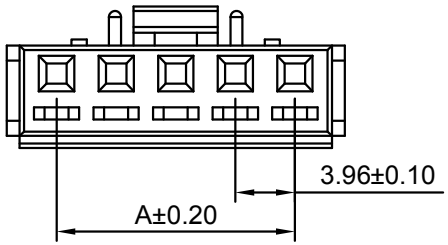

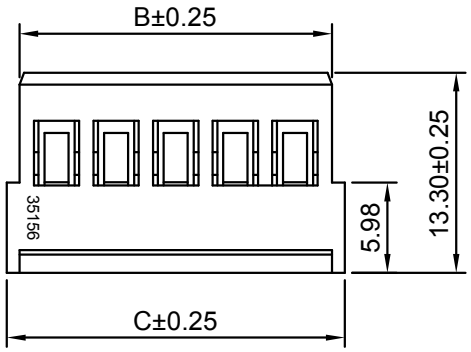


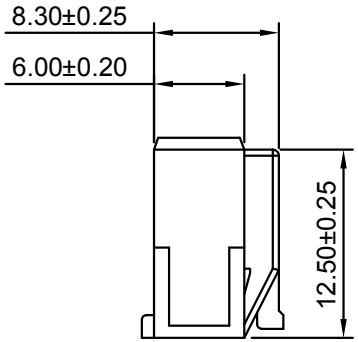



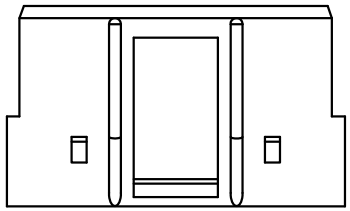

4P~8P

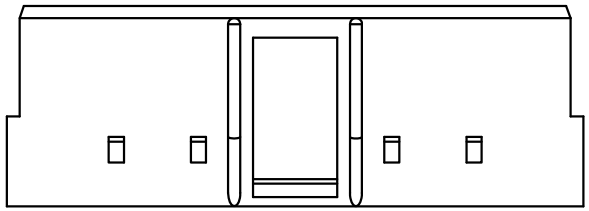

9P~15P

SPECIFICATIONS:
Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(White,GWT 750°C)

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
HDGC3965HA-4P-GWT	11.88	16.80	18.50
HDGC3965HA-5P-GWT	15.84	20.76	22.46
HDGC3965HA-6P-GWT	19.80	24.72	26.42
HDGC3965HA-7P-GWT	23.76	28.98	30.38
HDGC3965HA-8P-GWT	27.72	32.94	34.34
HDGC3965HA-9P-GWT	31.68	36.90	38.30
HDGC3965HA-10P-GWT	35.64	40.56	42.26
HDGC3965HA-11P-GWT	39.60	44.52	46.22
HDGC3965HA-12P-GWT	43.56	48.58	50.18
HDGC3965HA-13P-GWT	47.52	52.44	54.14
HDGC3965HA-14P-GWT	51.48	56.40	58.10
HDGC3965HA-15P-GWT	55.44	60.36	62.06

Unit: mm

深圳市华德共创科技有限公司
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	3.96mm Pitch Housing		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC3965HA-XP-GWT		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2015-05-25	1:1	mm	A008