


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2012-03-21

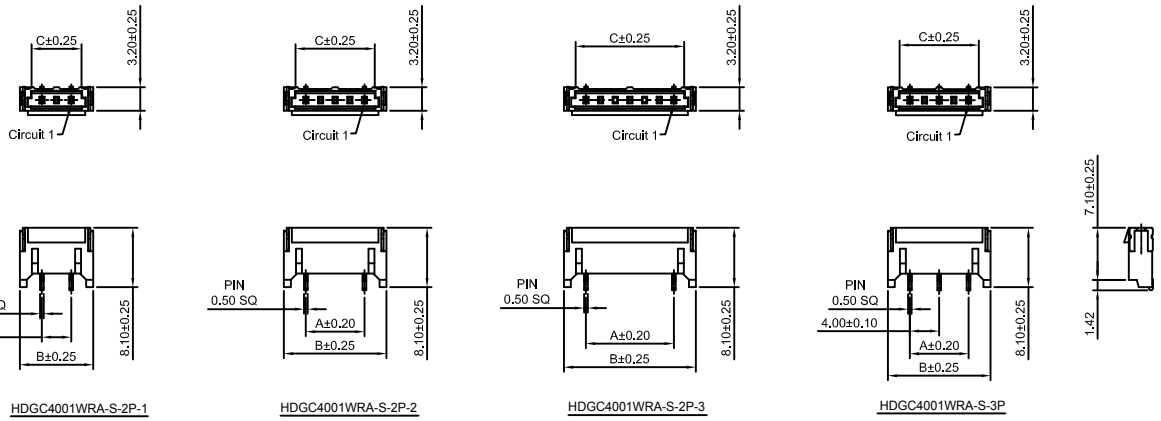


HDGC4001WRA-S-2P-1 HDGC4001WRA-S-2P-2 HDGC4001WRA-S-2P-3 HDGC4001WRA-S-3P

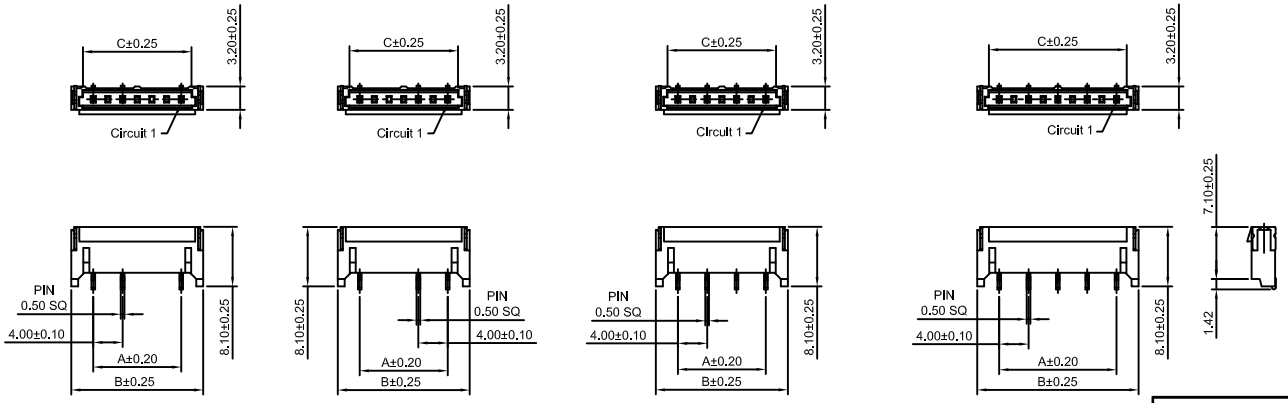

HDGC4001WRA-S-4P-137 HDGC4001WRA-S-4P-157 HDGC4001WRA-S-4P HDGC4001WRA-S-5P



P.C.B LAYOUT



SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1800V AC/minute
PIN Material: Brass/Tin over Nickel
Solder PIN Material: Brass/Tin over Nickel
Material: Nylon 6T,UL94V-0 (Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
2P-1	4.00	10.00	6.80
2P-2	8.00	14.00	10.80
2P-3	12.00	18.00	14.80
3P	8.00	14.00	10.80

Circuits	Dimensions(mm)		
	A	B	C
4P-137	12.00	18.00	14.80
4P-157	12.00	18.00	14.80
4P	12.00	18.00	14.80
5P	16.00	22.00	18.80

深圳市华德共创科技有限公司
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	4.00mm Pitch 90° Wafer		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC4001WRA-S-XP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2012-03-21	1:1	mm	A008