


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2012-03-21

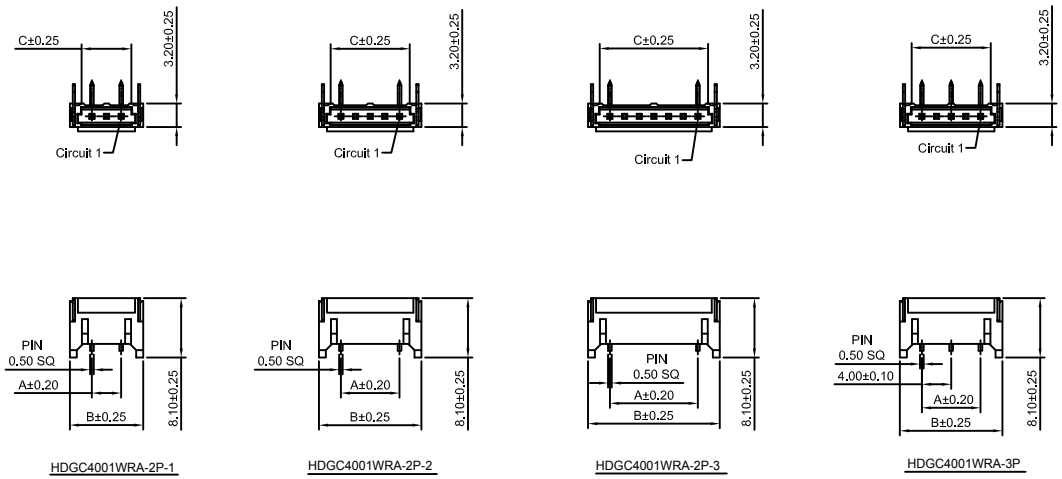


HDGC4001WRA-2P-1 HDGC4001WRA-2P-2 HDGC4001WRA-2P-3 HDGC4001WRA-3P






SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1800V AC/minute
PIN Material: Brass/Tin over Nickel
Solder PIN Material: Brass/Tin over Nickel
Material: Nylon 6T,UL94V-0 (Beige)

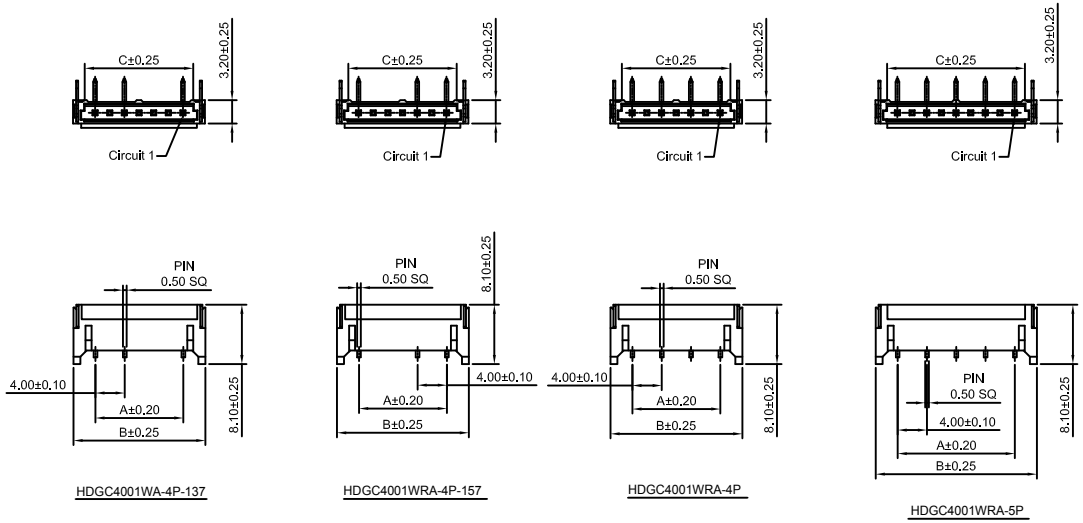


HDGC4001WA-4P-137 HDGC4001WRA-4P-157 HDGC4001WRA-4P HDGC4001WRA-5P



Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P-1	4.00	10.00	6.80	4P-137	12.00	18.00	14.80
2P-2	8.00	14.00	10.80	4P-157	12.00	18.00	14.80
2P-3	12.00	18.00	14.80	4P	12.00	18.00	14.80
3P	8.00	14.00	10.80	5P	16.00	22.00	18.80



深圳市华德共创科技有限公司
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				APPD: 核准： XIE	TITLE: 产品名称： 4.00mm Pitch 90° Wafer			
X.X	±0.30	X.X°	±3°		PART NO: 产品编号： HDGC4001WRA-XP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对： WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图： WANG	2012-03-21	1:1	mm	A008