

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2015-06-10

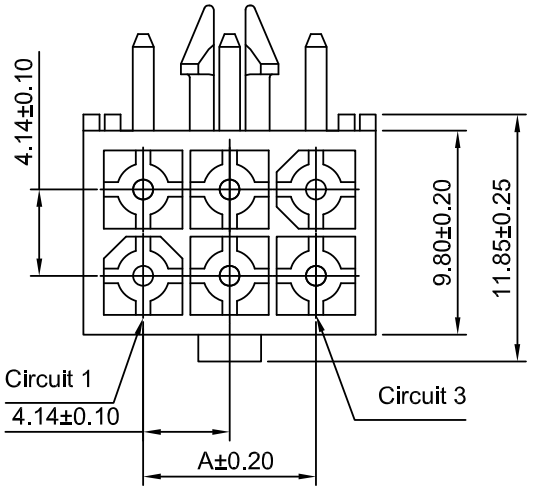

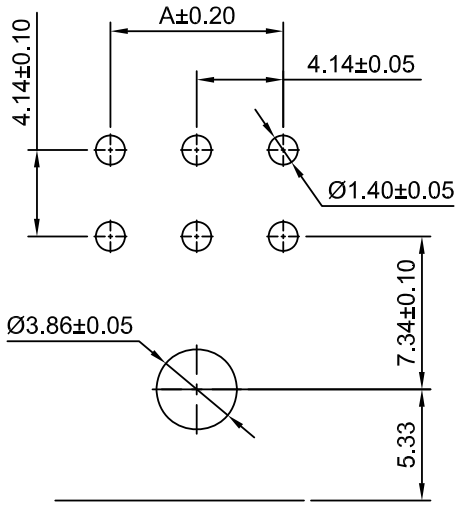



P.C.B LAYOUT

Ordering Information:

HDGC4140WR-2xXP - **
1 2

1.Part No.
2.Plated:
(blank):Tin over Nickel
G:Gold over Nickel

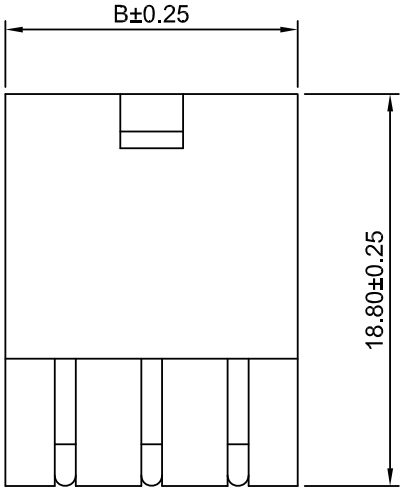

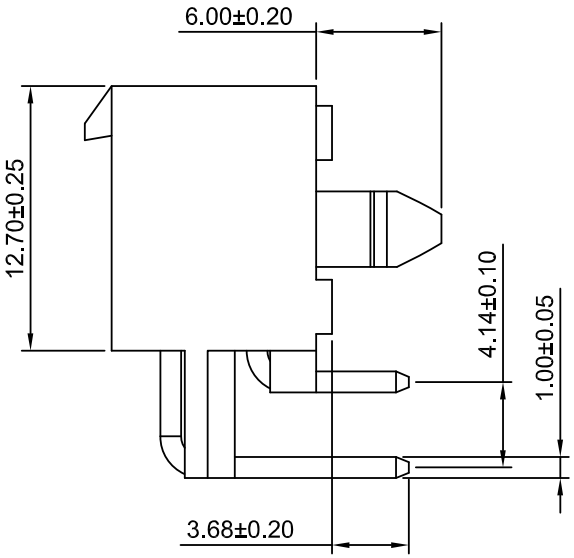

SPECIFICATIONS:
Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	4.14	9.83	2x5P	16.56	22.25
2x3P	8.28	13.97	2x6P	20.70	26.39
2x4P	12.42	18.11			

深圳市华德共创科技有限公司
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	4.14mm Pitch 90° Wafer		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC4140WR-2xXP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2015-06-10	3:1	mm	A008