



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2012-11-25

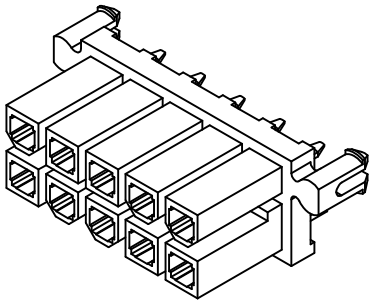

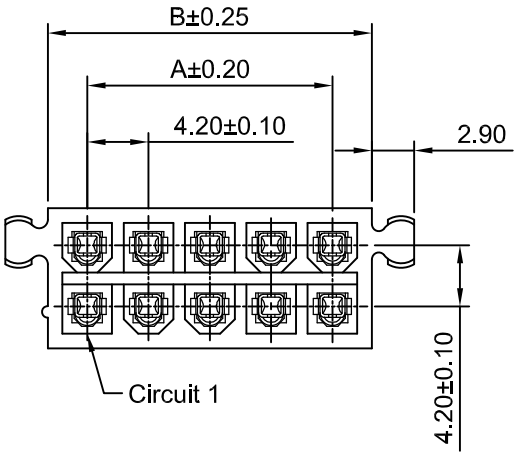

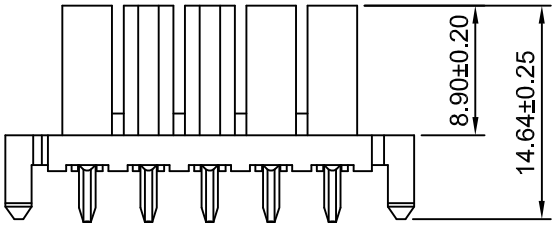




Ordering Information:

HDGC4201HV-2xXP - ** - ** - **
1 2 3 4

1.Part No.
2.Material:
(blank):Nylon 66 UL94V-2
V0:Nylon 66 UL94V-0
GWT:Nylon 66 UL94V-0,GWT 750°C
3.Color:
(blank):Natural
WH:White
BK:Black
RD:Red
YL:Yellow
BL:Blue
4.Finish:
(blank):Tin over Nickel
G:Gold over Nickel(1u")
G3:Gold over Nickel(3u")
G15:Gold over Nickel(15u")
G30:Gold over Nickel(30u")

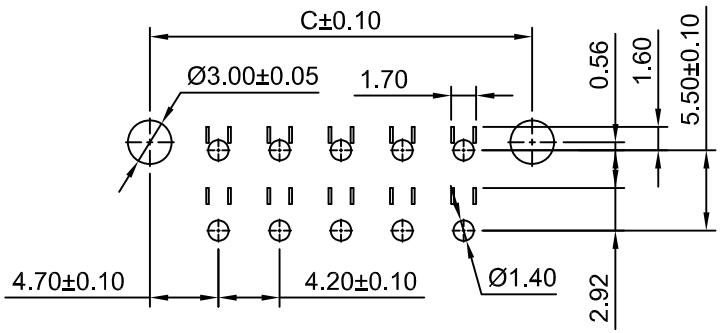

PCB LAYOUT:Component Side
Recommended PCB Thickness 1.78MAX

SPECIFICATIONS:
Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
2x1P	---	5.40	9.40
2x2P	4.20	9.60	13.60
2x3P	8.40	13.80	17.80
2x4P	12.60	18.00	22.00
2x5P	16.80	22.20	26.20
2x6P	21.00	26.40	30.40
2x7P	25.20	30.60	34.60

Circuits	Dimensions(mm)		
	A	B	C
2x8P	29.40	34.80	38.80
2x9P	33.60	39.00	43.00
2x10P	37.80	43.20	47.20
2x11P	42.00	47.40	51.40
2x12P	46.20	51.60	55.60
2x18P	71.40	76.80	80.80

深圳市华德共创科技有限公司
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				APPD: 核准： XIE	TITLE: 产品名称： 4.20mm Pitch Header			
X.X	±0.30	X.X°	±3°		PART NO: 产品编号： HDGC4201HV-2xXP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对： WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图： WANG	2012-11-25	2:1	mm	A008