


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2015-05-22



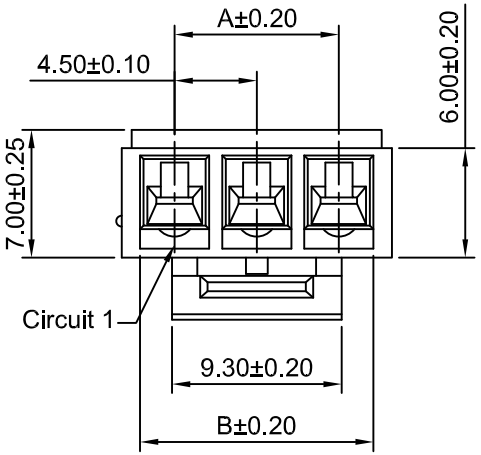


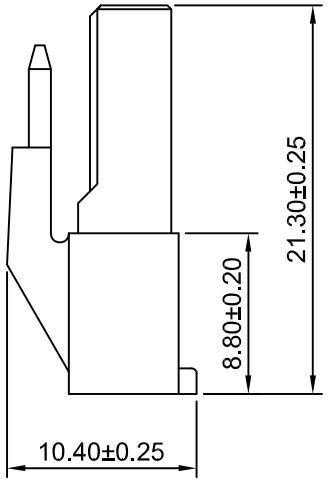


Ordering Information:

HDGC4501HF-XP - **
1 2

1.Part No.
2.Material:
(blank):UL94V-0/White
V2:UL94V-2/Natural

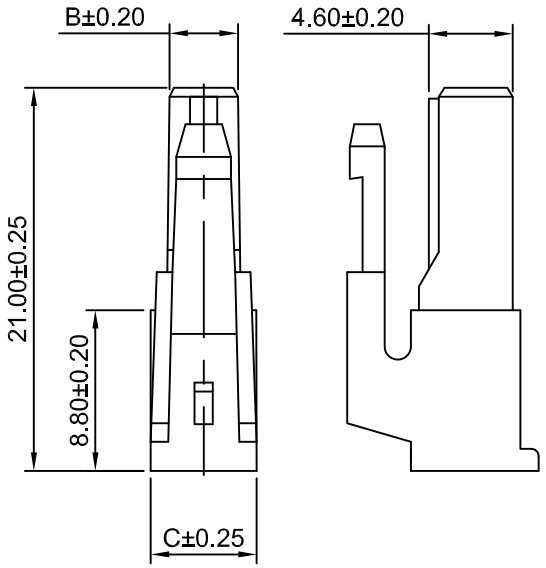

1P

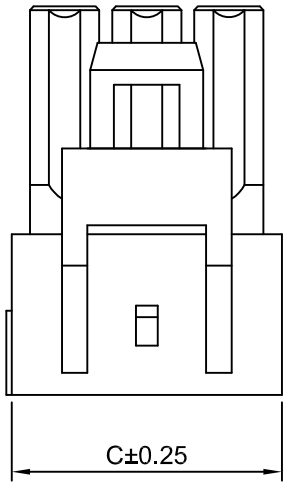

2P~3P

SPECIFICATIONS:
Current Rating: 10A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 7mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
1P	---	3.80	5.80
2P	4.50	8.30	10.30

Circuits	Dimensions(mm)		
	A	B	C
3P	9.00	12.80	14.80

深圳市华德共创科技有限公司
SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	4.50mm Pitch Housing		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC4501HF-XP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2015-05-22	2.5:1	mm	A008