

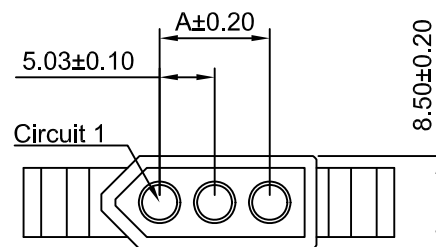
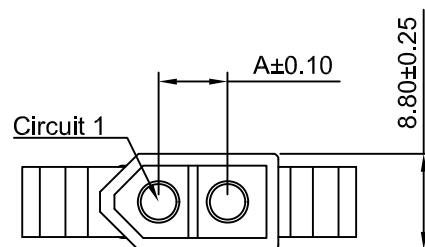



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2015-04-10

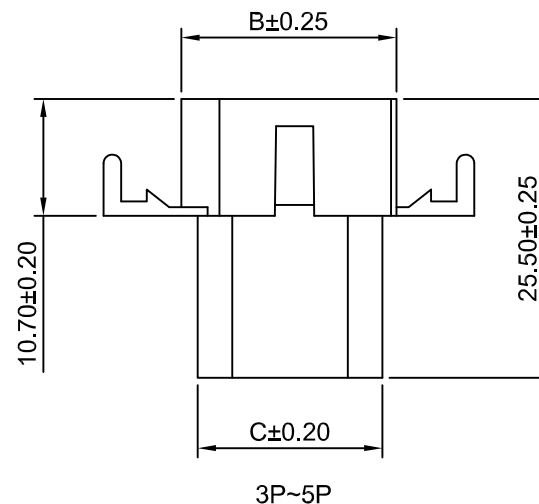

Ordering Information:
HDGC5030HMB-XP - **
1 2

- 1.Part No.
2.Material:
(blank):UL94V-2/Natural
V0:UL94V-0/White

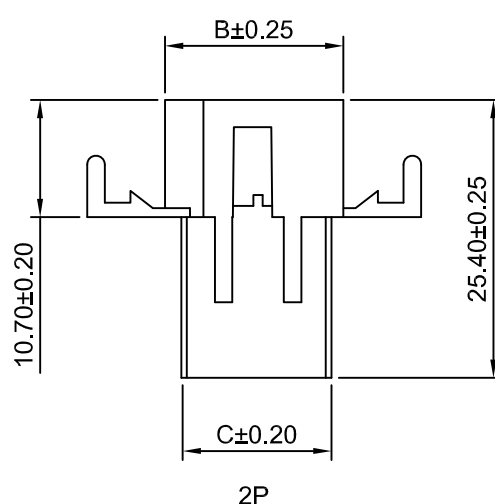

SPECIFICATIONS:

Current Rating:12A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range:-25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	6.30	16.30	13.60	4P	15.09	24.67	22.07
3P	10.06	19.64	17.04	5P	20.12	29.70	27.10



深圳市华德共创科技有限公司

SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 5.03mm Pitch 产品名称: Housing			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO:		HDGC5030HMB-XP	
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2015-04-10	1.5:1	mm	A008