

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2011-06-12

Ordering Information:
HDGC5081H-XP - **
1 2

1.Part No.

2.Style:

(blank)-Type 1

2-Type 2

3.Color:

(blank):Natural


BK:Black

RD :Red

BL:Blue

YL:Yellow

GN:Green

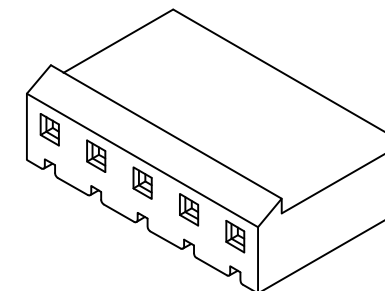

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	5.08	10.08	12P	55.88	60.88
3P	10.16	15.16	13P	60.96	65.96
4P	15.24	20.24	14P	66.04	70.04
5P	20.32	25.32	15P	71.12	76.12
6P	25.40	30.40	16P	76.20	81.20
7P	30.48	35.48	17P	81.28	86.28
8P	35.56	40.56	18P	86.36	91.36
9P	40.64	45.64	19P	91.44	96.44
10P	45.72	50.72	20P	96.52	101.52
11P	50.80	55.80			



深圳市华德共创科技有限公司

SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD

TEL : 0755-27129737

FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 5.08mm Pitch Housing	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC5081H-XP
		DATE	SCALE	UNIT	CODE NUMBER
		2011-06-12	3:1	mm	A008