

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2015-05-21

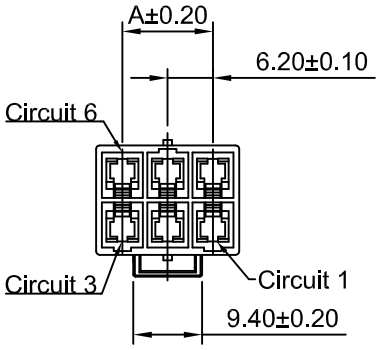

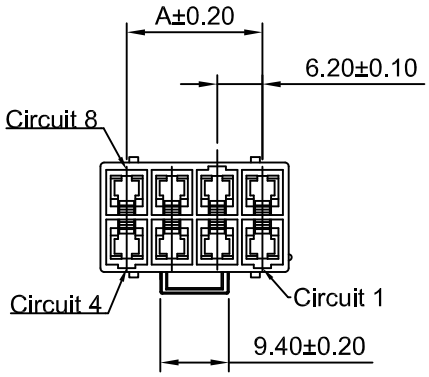

Ordering Information:

HDGC6201HMA-2xXP - **


1 2

1.Part No.


2.Material:

(blank):UL94V-2/Natural


V0:UL94V-0/White



2x2P~2x3P



2x4P~2x6P

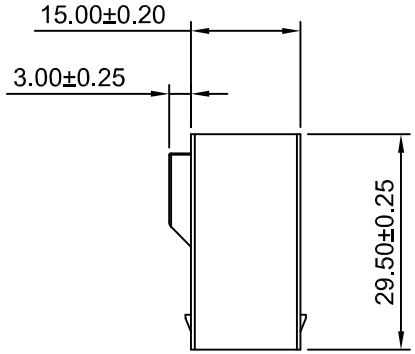

SPECIFICATIONS:

Current Rating:20A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range:-25°C ~ +85°C

Contact Resistance: 7mΩMax.

Insulation Resistance: 100MΩMin.

Withstanding Voltage: 2000V AC/minute

Material:Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
2x2P	6.20	13.40
2x3P	12.40	19.60

Circuits	Dimensions(mm)	
	A	B
2x4P	18.60	25.80
2x6P	31.00	38.20

深圳市华德共创科技有限公司

SHENZHEN HUADE CO-CREATE TECHNOLOGY CO.,LTD

TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：	6.20mm Pitch Housing		
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC6201HMA-2xXP		
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2015-05-21	1:1	mm	A008