
HDGC1261 Series 1.25mm (.049") Pitch Wire to Board Connector



Specifications


Current rating:1A AC,DC
Voltage rating:125V AC,DC
Temperature range:-25°C~+85°C
Contact resistance:20mΩMax.
Insulation resistance:100MΩMin.
Withstanding voltage:250V AC/minute
Compliant with RoHS and REACH
Meet the HF/Halogen Free,need to customize
Contact HDGC for details

HDGC1261 Series 1.25mm (.049") Pitch Wire to Board Connector

HDGC1261-T

1.25mm pitch Crimp Terminal

Reference Informations:
*Used in HDGC1261H-XP series Housing

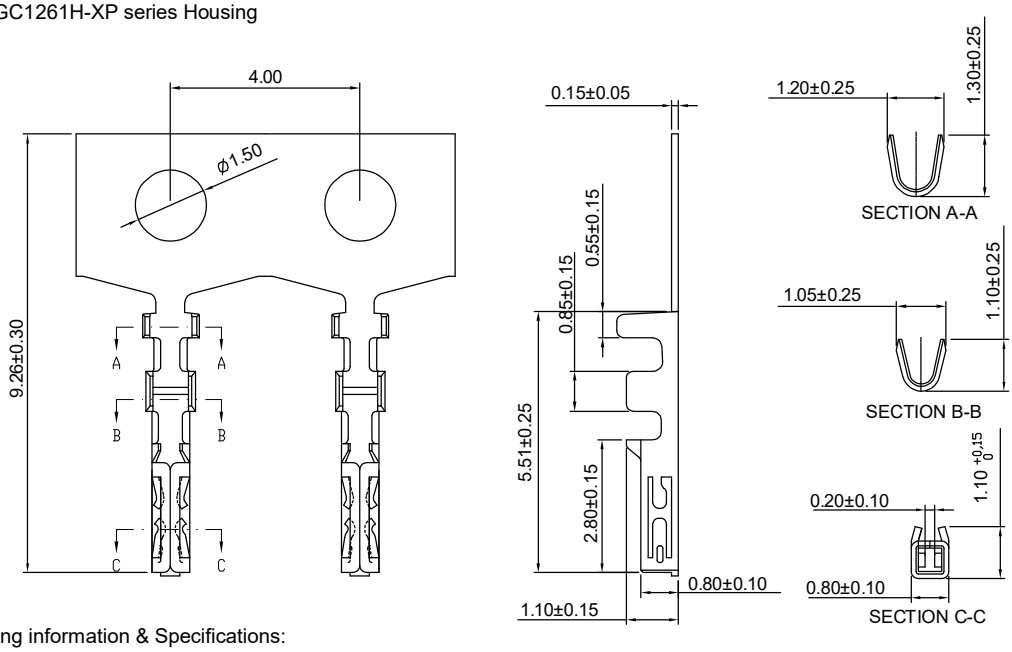

Ordering information & Specifications:

Unit:mm

Part NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
HDGC1261-TP	AWG#28-#32	1.00mm(max)	Phosphor Bronze	Tin over Nickel	20,000 PCS
HDGC1261-GP	AWG#28-#32	1.00mm(max)	Phosphor Bronze	Gold over Nickel	20,000 PCS


Optional Gold plating available but MOQ requested


HDGC1261H-XP

1.25mm pitch Housing

Reference Informations:
*Material:Nylon 66,UL94V-0
*Suitable HDGC1261-T series Terminal
*Color:White

Ordering Information:
HDGC1261H-XP - *** (1 = Part No., 2 = Material)
1.Part No.
2.Material:
(blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750°C



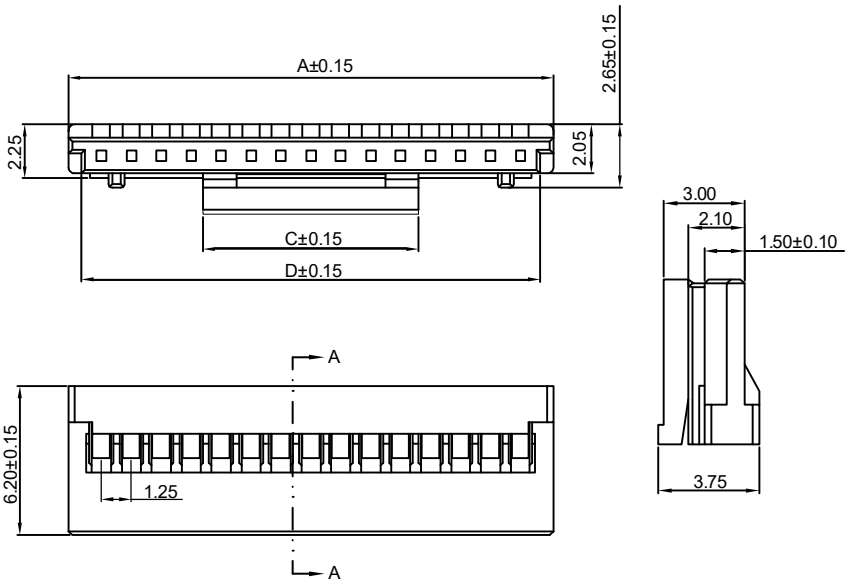

Ordering Information & Dimensions:

PART NO.	Dimensions		
	A	B	C
5P			
8P			
10P			
12P			
15P	20.25	19.15	9.00

Unit: mm