

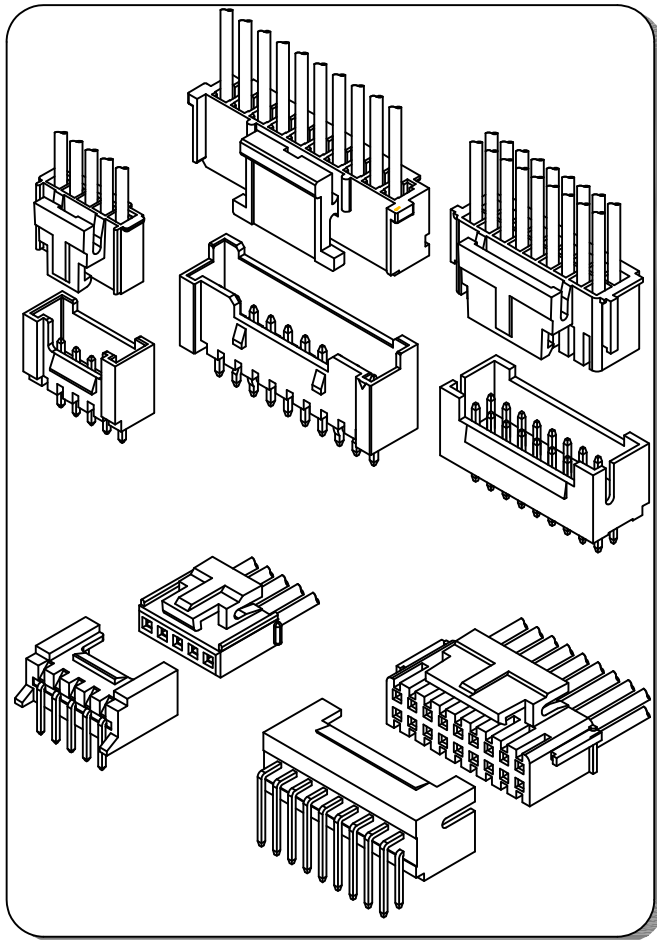
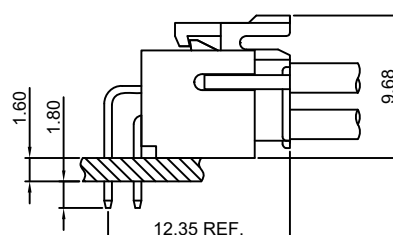



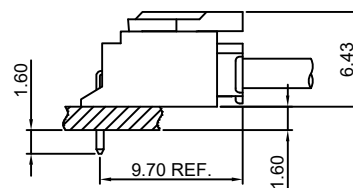

Specifications

- Current rating:3A AC,DC
- Voltage rating:250V AC,DC
- Temperature range:-25°C~+85°C
- Contact resistance:30mΩMax.
- Insulation resistance:1000MΩMin.
- Withstanding voltage:1000V AC/minute
- *Compliant with RoHS and REACH*
- *Meet the HF/Halogen Free,need to customize*
- *Contact HDGC for details*

Assembly layout






HDGC2008 Series 2.00mm (.079") Pitch Wire to Board and Wire to Wire Connector

HDGC2008-T

2.00mm pitch Crimp Terminal

Reference Informations:

*Used in HDGC2008H-XP, 2009H-2xXP series Housing

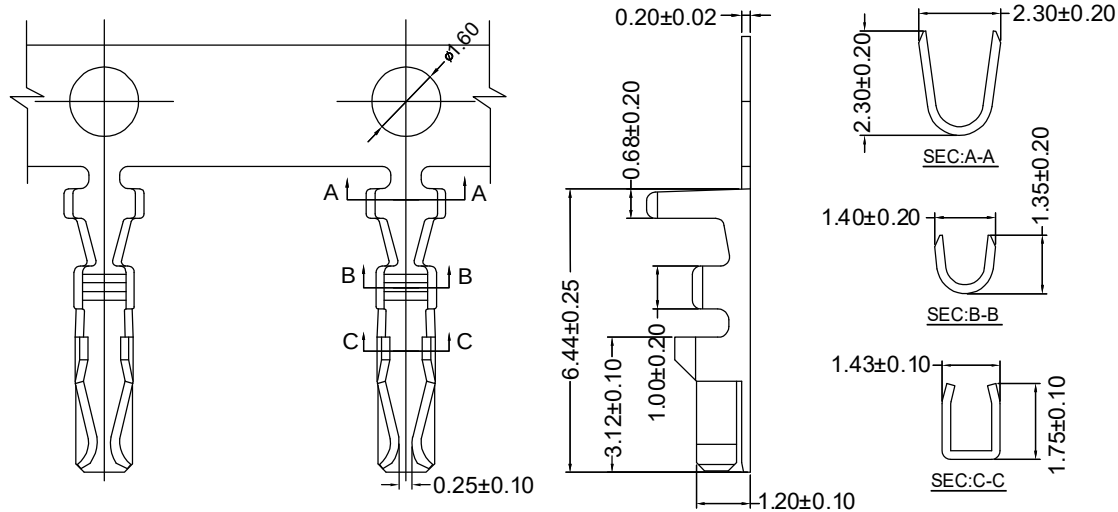

Ordering information & Specifications:

Unit:mm

Part NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
HDGC2008-TP	AWG#22-#30	1.45mm(max)	Phosphor Bronze	Tin over Nickel	17,000 PCS
HDGC2008-GP	AWG#22-#30	1.45mm(max)	Phosphor Bronze	Gold over Nickel	17,000 PCS


Optional Gold plating available but MOQ requested

HDGC2008-T-A

2.00mm pitch Crimp Terminal

Reference Informations:

*Used in HDGC2008HB-XP, 2008H-2xXP series Housing

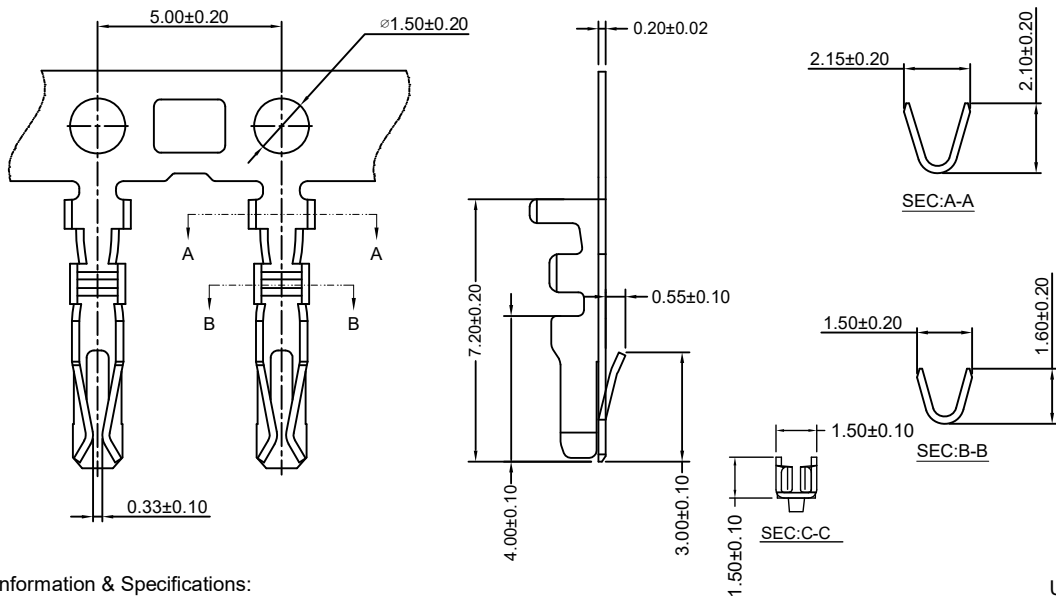

Ordering information & Specifications:

Unit:mm

Part NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
HDGC2008-TP-A	AWG#22-#30	1.45mm(max)	Phosphor Bronze	Tin over Nickel	19,000 PCS
HDGC2008-GP-A	AWG#22-#30	1.45mm(max)	Phosphor Bronze	Gold over Nickel	19,000 PCS

Optional Gold plating available but MOQ requested




HDGC2008 Series 2.00mm (.079") Pitch Wire to Board and Wire to Wire Connector

HDGC2008M-T

2.00mm pitch Crimp Terminal

Reference Informations:

*Used in HDGC2008HM, HMB-XP series Single Row Housing

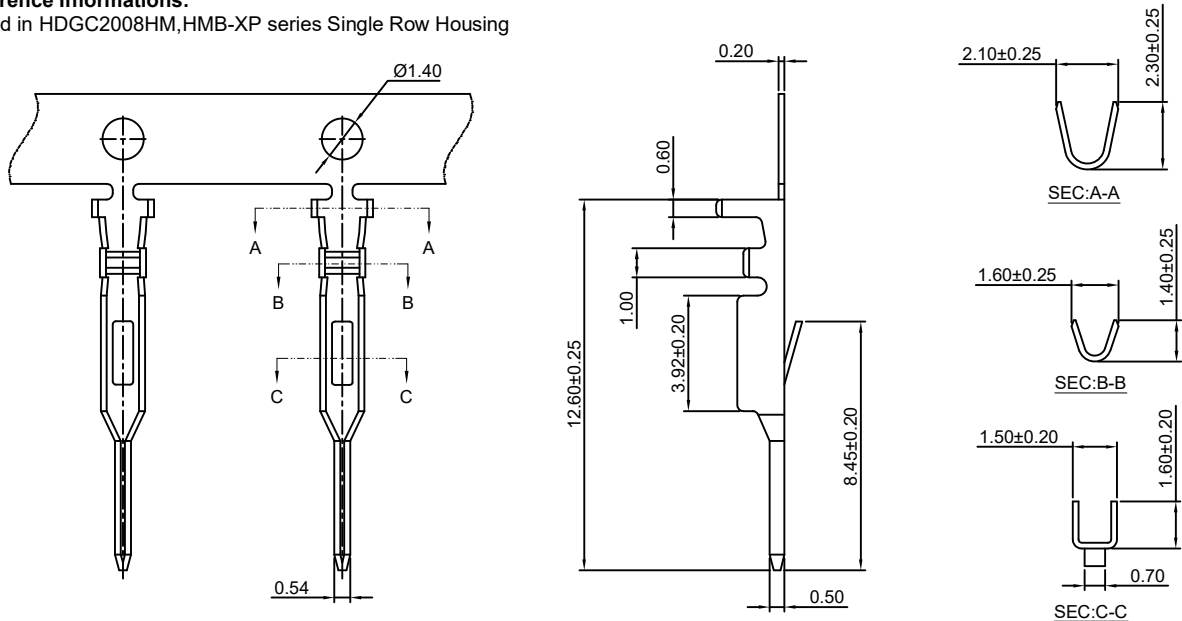

Ordering information & Specifications:

Unit:mm

Part NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
HDGC2008M-TP	AWG#22-#28	1.50mm(max)	Phosphor Bronze	Tin over Nickel	15,000 PCS
HDGC2008M-GP	AWG#22-#28	1.50mm(max)	Phosphor Bronze	Gold over Nickel	15,000 PCS

Optional Gold plating available but MOQ requested

HDGC2008H-XP

2.00mm pitch Housing

Reference Informations:

*Material:Nylon 66,UL94V-0

*Suitable HDGC2008-T series Terminal

*Mates with HDGC2008HM, HMB-XP series Single Row Housing or HDGC2008WV, WR, WV-S, WR-S-XP series Single Row Wafer

*Color:White

Ordering Information:



HDGC2008H-XP - ***
1 2

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750℃

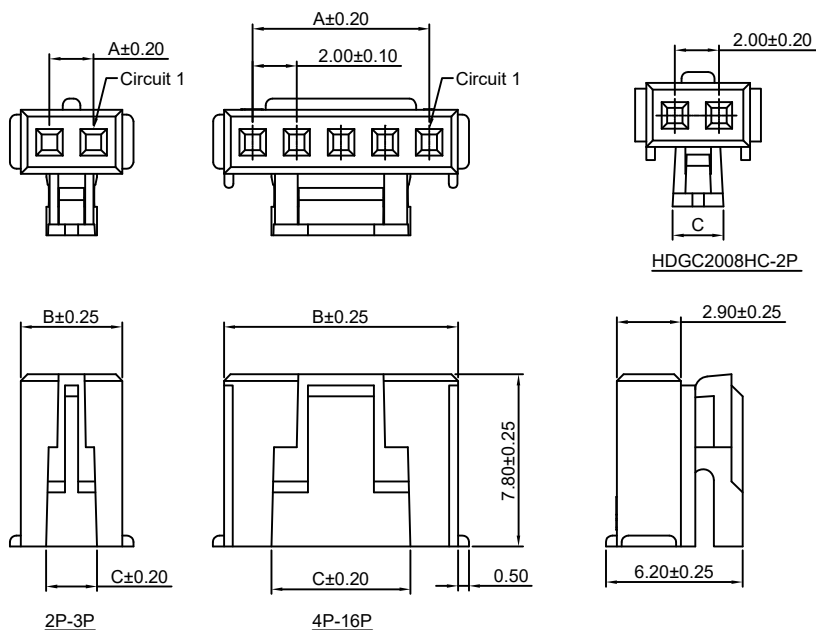

Ordering Information & Dimensions:

PART NO.	Dimensions		
	A	B	C
2P	2.00	4.60	2.30
3P	4.00	6.60	2.30
4P	6.00	8.60	4.30
5P	8.00	10.60	6.40
6P	10.00	12.60	6.40
7P	12.00	14.60	6.40
8P	14.00	16.60	6.40
9P	16.00	18.60	6.40
10P	18.00	20.60	14.40
11P	20.00	22.60	14.40
12P	22.00	24.60	14.40
13P	24.00	26.60	14.40
14P	26.00	28.60	14.40
15P	28.00	30.60	14.40
16P	30.00	32.60	14.40

Unit: mm





HDGC2008 Series 2.00mm (.079") Pitch Wire to Board and Wire to Wire Connector

HDGC2008HA-XP

2.00mm pitch Housing

Reference Informations:



- *Material: Nylon 66, UL94V-0
- *Suitable HDGC2010-T series Terminal
- *Mates with HDGC2008WVA, WRA-XP series Wafer
- *Color: Ivory

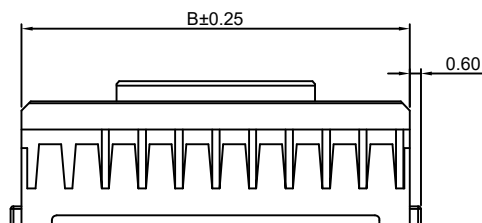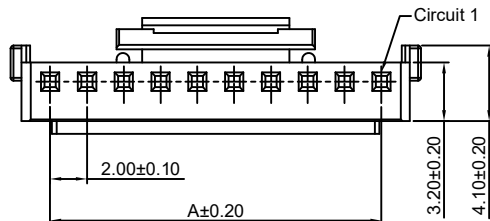

Ordering Information:

HDGC2008HA-XP - *** - **
1 2 3

1. Part No.
2. Material:
(Blank): Nylon 66, UL94V-0
GWT: Nylon 66, UL94V-0, GWT 750 °C
3. Color:
(Blank): White
BK: Black
RD: Red
YL: Yellow
BL: Blue
GN: Green
GY: Gray



Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
4P	6.00	9.10
5P	8.00	11.10
6P	10.00	13.10
7P	12.00	15.10
8P	14.00	17.10
9P	16.00	19.10
10P	18.00	21.10
11P	20.00	23.10
12P	22.00	25.10
13P	24.00	27.10
14P	26.00	29.10
15P	28.00	31.10
16P	30.00	33.10
17P	32.00	35.10
18P	34.00	37.10
19P	36.00	39.10
20P	38.00	41.10


Unit: mm

HDGC2008HB-XP


2.00mm pitch Housing

Reference Informations:


- *Material: Nylon 66, UL94V-0
- *Suitable HDGC2008-T-A series Terminal
- *Mates with HDGC2008WV, WR, WV-S, WR-S-XP series Single Row Wafer or HDGC2008HM, HMB-XP series Single Row Housing or HDGC2008S-XP series Seal
- *Color: White




5P~16P






4P



2P~3P



HDGC2008HD-2P



Ordering Information:

HDGC2008HB-XP - *** - **
1 2 3

1. Part No.
2. Material:
(Blank): Nylon 66, UL94V-0
GWT: Nylon 66, UL94V-0, GWT 750 °C
3. Color:
(Blank): White
BK: Black
RD: Red
YL: Yellow
BL: Blue
GN: Green
GY: Gray

Ordering Information & Dimensions:

PART NO.	Dimensions		
	A	B	C
2P	2.00	7.00	4.60
3P	4.00	9.00	6.60
4P	6.00	11.00	8.60
5P	8.00	13.00	10.60
6P	10.00	15.00	12.60
7P	12.00	17.00	14.60
8P	14.00	19.00	16.60
9P	16.00	21.00	18.60
10P	18.00	23.00	20.60
11P	20.00	25.00	22.60
12P	22.00	27.00	24.60
13P	24.00	29.00	26.60
14P	26.00	31.00	28.60
15P	28.00	33.00	30.60

Unit: mm



HDGC2008 Series 2.00mm (.079") Pitch Wire to Board and Wire to Wire Connector

HDGC2008HM-XP

2.00mm pitch Housing





Reference Informations:

- *Material:Nylon 66,UL94V-0
- *Suitable HDGC2008M-T series Terminal
- *Mates with HDGC2008H,HB-XP series Single Row Housing
- *Color:White

Ordering Information:

HDGC2008HM-XP - $\frac{***}{1} - \frac{**}{2} - \frac{**}{3}$

- 1.Part No.
- 2.Material:
(Blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750℃
- 3.Color:
(Blank):White
BK:Black
RD:Red
YL:Yellow
BL:Blue
GN:Green
GY:Gray

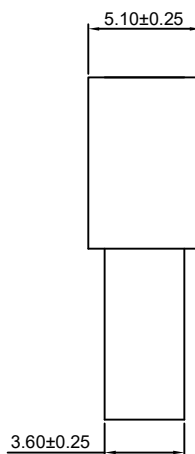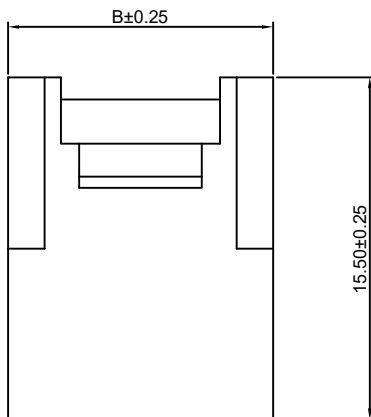

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
2P	2.00	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00

Unit: mm

HDGC2008HMB-XP

2.00mm pitch Housing




Reference Informations:

- *Material:Nylon 66,UL94V-0
- *Suitable HDGC2008M-T series Terminal
- *Mates with HDGC2008H,HB-XP series Single Row Housing or HDGC2008S-XP series Seal
- *Color:White

Ordering Information:

HDGC2008HMB-XP - $\frac{***}{1} - \frac{**}{2} - \frac{**}{3}$

- 1.Part No.
- 2.Material:
(Blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750℃
- 3.Color:
(Blank):White
BK:Black
RD:Red
YL:Yellow
BL:Blue
GN:Green
GY:Gray

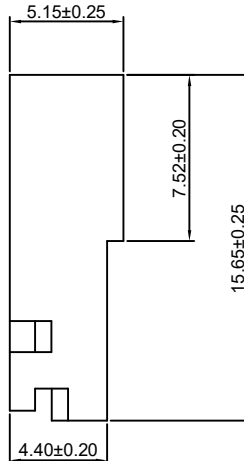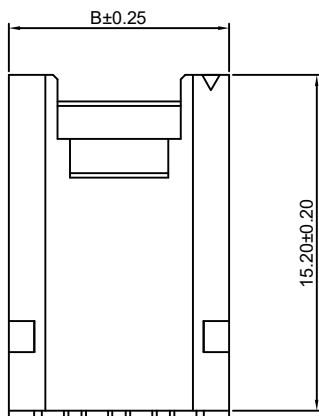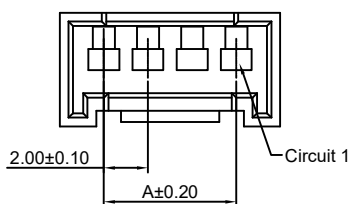

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
2P	2.00	5.98
3P	4.00	7.98
4P	6.00	9.98
5P	8.00	11.98
6P	10.00	13.98
7P	12.00	15.98
8P	14.00	17.98
9P	16.00	19.98
10P	18.00	21.98
11P	20.00	23.98
12P	22.00	25.98
13P	24.00	27.98
14P	26.00	29.98
15P	28.00	31.98

Unit: mm





HDGC2008 Series 2.00mm (.079") Pitch Wire to Board and Wire to Wire Connector

HDGC2008H-2xXP

2.00mm pitch Dual Row Housing


Reference Informations:

- *Material:Nylon 66,UL94V-0
- *Suitable HDGC2008-T-A series Terminal
- *Mates with HDGC2008WV,WR,WV-S-2xXP series Dual Row Wafer
- *Color:White

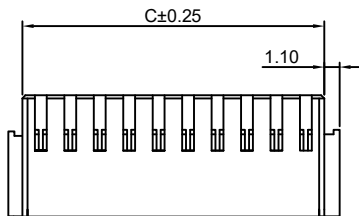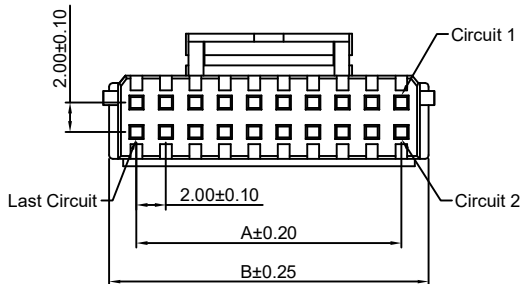

Ordering Information:
HDGC2008H-2xXP - ***
1 2

- Part No.
- Material:
(Blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750 °C



Ordering Information & Dimensions:

PART NO.	Dimensions		
	A	B	C
2x2P	2.00	5.70	4.70
2x3P	4.00	7.70	6.70
2x4P	6.00	9.70	8.70
2x5P	8.00	11.70	10.70
2x6P	10.00	13.70	12.70
2x7P	12.00	15.70	14.70
2x8P	14.00	17.70	16.70
2x9P	16.00	19.70	18.70
2x10P	18.00	21.70	20.70
2x11P	20.00	23.70	22.70
2x12P	22.00	25.70	24.70
2x13P	24.00	27.70	26.70
2x14P	26.00	29.70	28.70
2x15P	28.00	31.70	30.70
2x16P	30.00	33.70	32.70
2x20P	38.00	41.70	40.70



Unit: mm

HDGC2008WV-XP

2.00mm pitch 180° Wafer



Reference Informations:

- *Material:Pin:Brass/Tin over Nickel
Insulator:Nylon 66,UL94V-0
- *Mates with HDGC2008H,HB-XP series Single Row Housing
- *Color:White

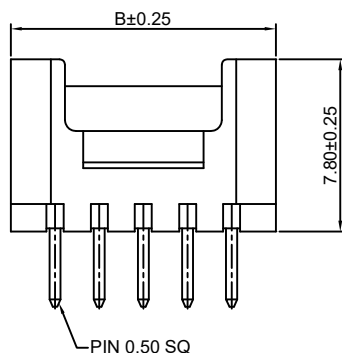

Ordering Information:
HDGC2008WV-XP - *** - ** - **
1 2 3 4

- Part No.
- Material:
(Blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750 °C
- Color:
(Blank):White
BK:Black
RD:Red
YL:Yellow
BL:Blue
GN:Green
GY:Gray
- Finish:
(Blank):Tin over Nickel
G:Gold over Nickel



Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
2P	2.00	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00

Unit: mm



HDGC2008 Series 2.00mm (.079") Pitch Wire to Board and Wire to Wire Connector

HDGC2008WR-XP

2.00mm pitch 90° Wafer

Reference Informations:

*Material:Pin:Brass/Tin over Nickel

Insulator:Nylon 66,UL94V-0

*Mates with HDGC2008H,HB-XP series Single Row Housing

*Color:White

Ordering Information:

HDGC2008WR-XP - $\frac{***}{1} - \frac{**}{2} - \frac{**}{3} - \frac{**}{4}$

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750 °C

3.Color:

(Blank):White

BK:Black

RD:Red

YL:Yellow

BL:Blue






GN:Green

GY:Gray

4.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel



Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
2P	2.00	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00

Unit: mm

HDGC2008WVA-XP

2.00mm pitch 180° Wafer

Reference Informations:

*Material:Pin:Brass/Tin over Nickel

Insulator:Nylon 66,UL94V-0

*Mates with HDGC2008HA-XP series Single Row Housing

*Color:Ivory

Ordering Information:

HDGC2008WVA-XP - $\frac{***}{1} - \frac{**}{2} - \frac{**}{3} - \frac{**}{4}$

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750 °C

3.Color:

(Blank):White

BK:Black

RD:Red

YL:Yellow

BL:Blue







GN:Green

GY:Gray

4.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel

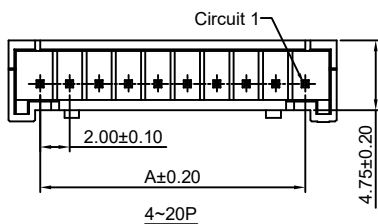

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
2P	2.00	7.70
3P	4.00	9.70
4P	6.00	10.30
5P	8.00	12.30
6P	10.00	14.30
7P	12.00	16.30
8P	14.00	18.30
9P	16.00	20.30
10P	18.00	22.30
11P	20.00	24.30
12P	22.00	26.30
13P	24.00	28.30
14P	26.00	30.30
15P	28.00	32.30
16P	30.00	34.30
17P	32.00	36.30
18P	34.00	38.30
19P	36.00	40.30
20P	38.00	42.30

Unit: mm



HDGC2008 Series 2.00mm (.079") Pitch Wire to Board and Wire to Wire Connector

HDGC2008WRA-XP

2.00mm pitch 90° Wafer

Reference Informations:

*Material: Pin: Brass/Tin over Nickel
Insulator: Nylon 66, UL94V-0

*Mates with HDGC2008HA-XP series Single Row Housing

*Color: Ivory

Ordering Information:

HDGC2008WRA-XP - *** - ** - **
1 2 3 4

1. Part No.

2. Material:

(Blank): Nylon 66, UL94V-0

GWT: Nylon 66, UL94V-0, GWT 750 °C

3. Color:

(Blank): White

BK: Black

RD: Red

YL: Yellow

BL: Blue








GN: Green

GY: Gray

4. Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

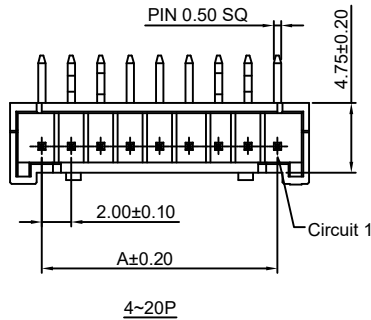

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
2P	2.00	7.70
3P	4.00	9.70
4P	6.00	10.30
5P	8.00	12.30
6P	10.00	14.30
7P	12.00	16.30
8P	14.00	18.30
9P	16.00	20.30
10P	18.00	22.30
11P	20.00	24.30
12P	22.00	26.30
13P	24.00	28.30
14P	26.00	30.30
15P	28.00	32.30
16P	30.00	34.30
17P	32.00	36.30
18P	34.00	38.30
19P	36.00	40.30
20P	38.00	42.30

Unit: mm

HDGC2008WV-2xXP

2.00mm pitch 180° Dual Row Wafer

Reference Informations:

*Material: Pin: Brass/Tin over Nickel
Insulator: Nylon 66, UL94V-0

*Mates with HDGC2008H-2xXP series Dual Row Housing

*Color: Ivory

Ordering Information:

HDGC2008WV-2xXP - *** - **
1 2 3

1. Part No.

2. Material:






(Blank): Nylon 66, UL94V-0

GWT: Nylon 66, UL94V-0, GWT 750 °C

3. Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

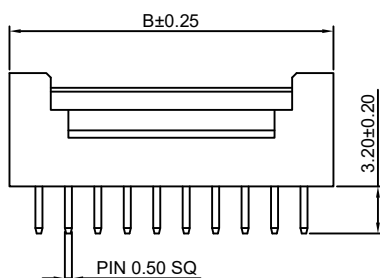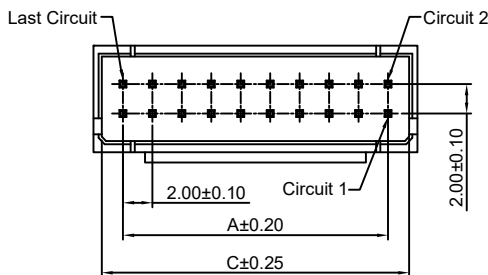

Ordering Information & Dimensions:

PART NO.	Dimensions		
	A	B	C
2x2P	2.00	6.00	4.80
2x3P	4.00	8.00	6.80
2x4P	6.00	10.00	8.80
2x5P	8.00	12.00	10.80
2x6P	10.00	14.00	12.80
2x7P	12.00	16.00	14.80
2x8P	14.00	18.00	16.80
2x9P	16.00	20.00	18.80
2x10P	18.00	22.00	20.80
2x11P	20.00	24.00	22.80
2x12P	22.00	26.00	24.80
2x13P	24.00	28.00	26.80
2x14P	26.00	30.00	28.80
2x15P	28.00	32.00	30.80
2x16P	30.00	34.00	32.80
2x20P	38.00	42.00	40.80

Unit: mm



HDGC2008 Series 2.00mm (.079") Pitch Wire to Board and Wire to Wire Connector

HDGC2008WR-2xXP

2.00mm pitch 90° Dual Row Wafer







Reference Informations:

*Material: Pin: Brass/Tin over Nickel

Insulator: Nylon 66, UL94V-0

*Mates with HDGC2008H-2xXP series Dual Row Housing

*Color: Ivory

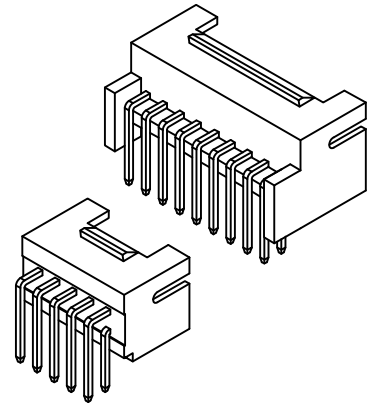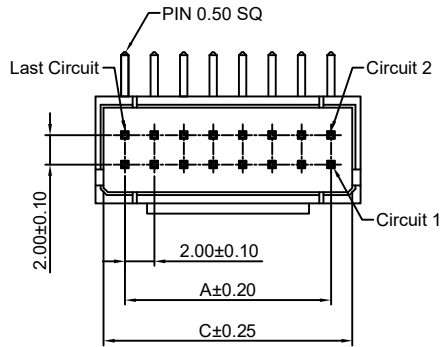

Ordering Information:

HDGC2008WR-2xXP - $\frac{***}{1} - \frac{**}{2} - \frac{**}{3}$

1. Part No.

2. Material:



(Blank): Nylon 66, UL94V-0

GWT: Nylon 66, UL94V-0, GWT 750 °C

3. Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

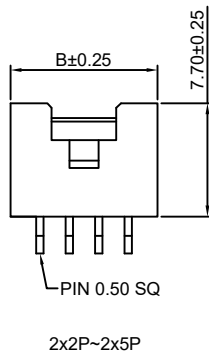

Ordering Information & Dimensions:

PART NO.	Dimensions		
	A	B	C
2x2P	2.00	6.00	4.80
2x3P	4.00	8.00	6.80
2x4P	6.00	10.00	8.80
2x5P	8.00	12.00	10.80
2x6P	10.00	14.00	12.80
2x7P	12.00	16.00	14.80
2x8P	14.00	18.00	16.80
2x9P	16.00	20.00	18.80
2x10P	18.00	22.00	20.80
2x11P	20.00	24.00	22.80
2x12P	22.00	26.00	24.80
2x13P	24.00	28.00	26.80
2x14P	26.00	30.00	28.80
2x15P	28.00	32.00	30.80
2x16P	30.00	34.00	32.80
2x20P	38.00	42.00	40.80

Unit: mm



HDGC2008 Series 2.00mm (.079") Pitch Wire to Board and Wire to Wire Connector

HDGC2008WV-S-XP

2.00mm pitch 180° Wafer-SMT TYPE

Reference Informations:

*Material:Pin:Brass/Tin over Nickel
Insulator:Nylon 6T,UL94V-0

*Mates with HDGC2008H,HB-XP series Single Row Housing

*Color:Ivory

Ordering Information:

HDGC2008WV-S-XP - $\frac{***}{1} - \frac{**}{2} - \frac{**}{3} - \frac{**}{4}$

1.Part No.

2.Material:

(Blank):Nylon 6T,UL94V-0

GWT:Nylon 6T,UL94V-0,GWT 750 °C

3.Color:

(Blank):White

BK:Black

RD:Red

YL:Yellow

BL:Blue




GN:Green

GY:Gray

4.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel

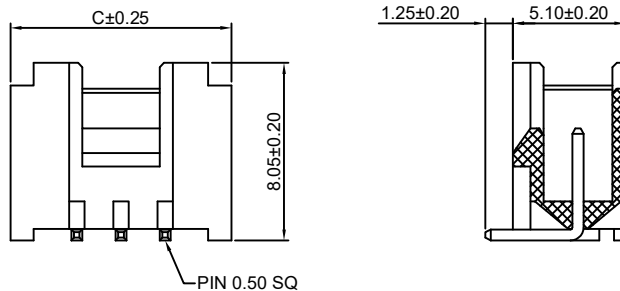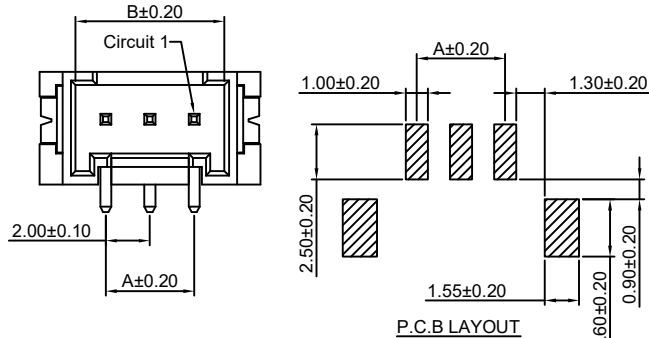

Ordering Information & Dimensions:

PART NO.	Dimensions		
	A	B	C
2P	2.00	4.75	8.00
3P	4.00	6.75	10.00
4P	6.00	8.75	12.00
5P	8.00	10.75	14.00
6P	10.00	12.75	16.00
7P	12.00	14.75	18.00
8P	14.00	16.75	20.00
9P	16.00	18.75	22.00
10P	18.00	20.75	24.00
11P	20.00	22.75	26.00
12P	22.00	24.75	28.00
13P	24.00	26.75	30.00
14P	26.00	28.75	32.00
15P	28.00	30.75	34.00
16P	30.00	32.75	36.00

Unit: mm

HDGC2008WR-S-XP

2.00mm pitch 90° Wafer-SMT TYPE

Reference Informations:

*Material:Pin:Brass/Tin over Nickel
Insulator:Nylon 6T,UL94V-0

*Mates with HDGC2008H,HB-XP series Single Row Housing

*Color:Beige

Ordering Information:

HDGC2008WR-S-XP - $\frac{***}{1} - \frac{**}{2} - \frac{**}{3} - \frac{**}{4}$

1.Part No.

2.Material:

(Blank):Nylon 6T,UL94V-0

GWT:Nylon 6T,UL94V-0,GWT 750 °C

3.Color:

(Blank):White

BK:Black

RD:Red

YL:Yellow

BL:Blue



GN:Green

GY:Gray

4.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel

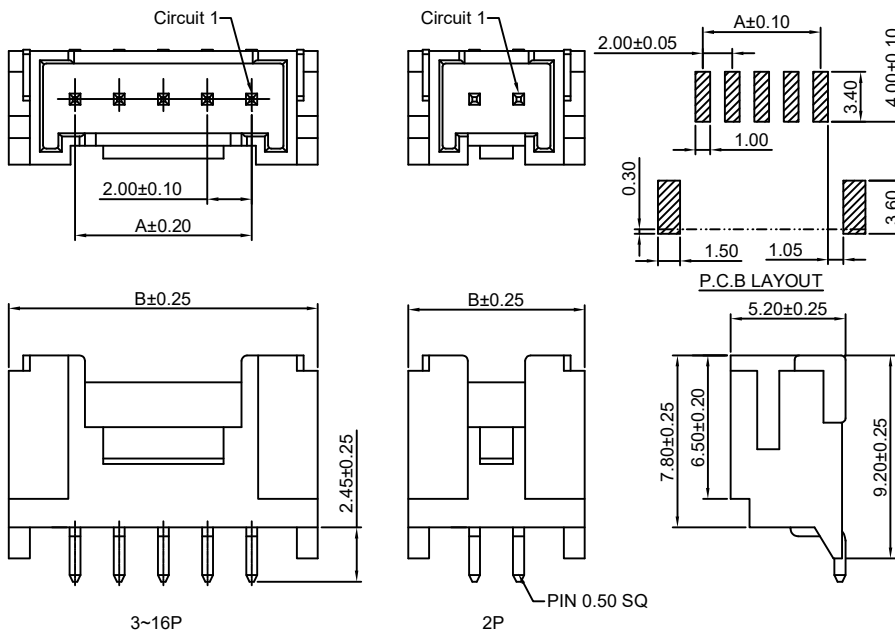

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
2P	2.00	8.00
3P	4.00	10.00
4P	6.00	12.00
5P	8.00	14.00
6P	10.00	16.00
7P	12.00	18.00
8P	14.00	20.00
9P	16.00	22.00
10P	18.00	24.00
11P	20.00	26.00
12P	22.00	28.00
13P	24.00	30.00
14P	26.00	32.00
15P	28.00	34.00
16P	30.00	36.00

Unit: mm



HDGC2008 Series 2.00mm (.079") Pitch Wire to Board and Wire to Wire Connector

HDGC2008WV-S-2xXP

-2.00mm pitch 180° Dual Row Wafer-SMT TYPE

Reference Informations:

*Material:Pin:Brass/Tin over Nickel

Insulator:Nylon 6T,UL94V-0

*Mates with HDGC2008H-2xXP series Dual Row Housing

*Color:Ivory

Ordering Information:

$$\frac{\text{HDGC2008WV-S-2xXP}}{1} - \frac{***}{2} - \frac{**}{3}$$

1.Part No.

2.Material:




(Blank):Nylon 6T,UL94V-0

GWT:Nylon 6T,UL94V-0,GWT 750 °C



3.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel

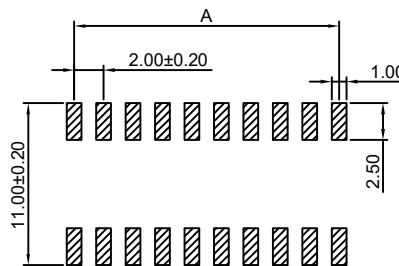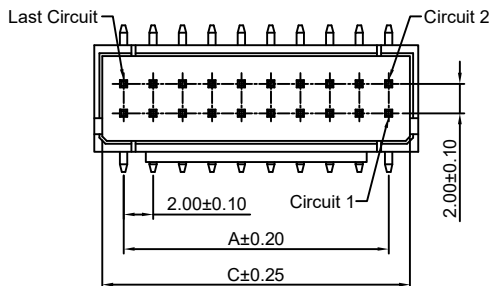

P.C.B LAYOUT

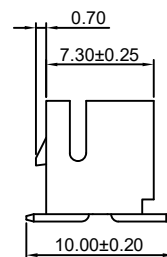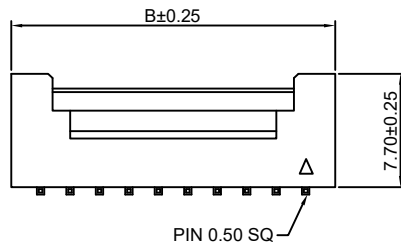

Ordering Information & Dimensions:

PART NO.	Dimensions		
	A	B	C
2x2P	2.00	6.00	4.80
2x3P	4.00	8.00	6.80
2x4P	6.00	10.00	8.80
2x5P	8.00	12.00	10.80
2x6P	10.00	14.00	12.80
2x7P	12.00	16.00	14.80
2x8P	14.00	18.00	16.80
2x9P	16.00	20.00	18.80
2x10P	18.00	22.00	20.80
2x11P	20.00	24.00	22.80
2x12P	22.00	26.00	24.80
2x13P	24.00	28.00	26.80
2x14P	26.00	30.00	28.80
2x15P	28.00	32.00	30.80
2x16P	30.00	34.00	32.80
2x20P	38.00	42.00	40.80

Unit: mm

HDGC2008S-XP


-2.00mm pitch Seal

Reference Informations:

*Material:Nylon 66,UL94V-2

*Use in HDGC2008HB,HMB-XP series Housing

*Color:Brick red

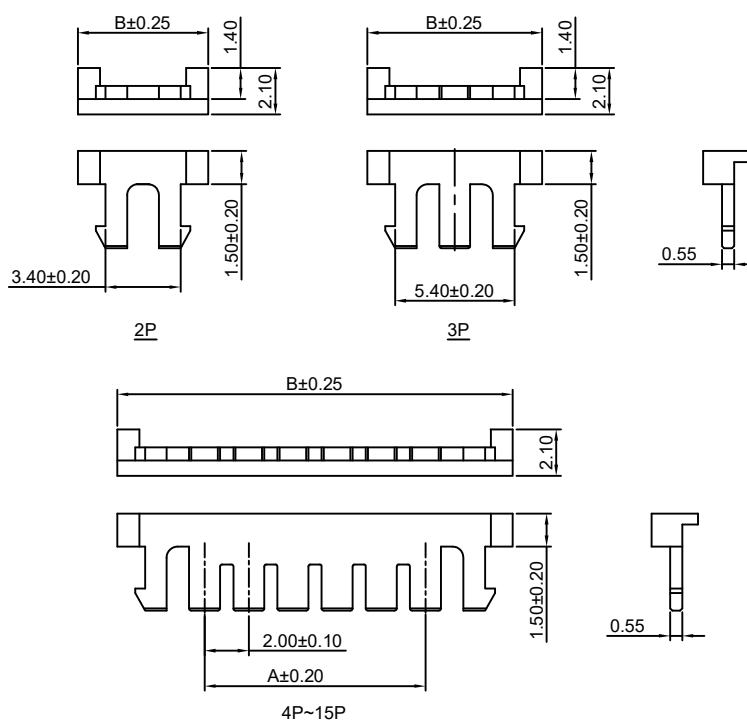

Ordering Information:

HDGC2008S-XP - ***

1 2

1.Part No.

2. Material:

(Blank):Nylon 66,UL94V-2

GWT:Nylon 66,UL94V-0,GWT 750 °C

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
2P	3.40	5.90
3P	5.40	7.90
4P	7.40	9.90
5P	9.40	11.90
6P	11.40	13.90
7P	13.40	15.90
8P	15.40	17.90
9P	17.40	19.90
10P	19.40	21.90
11P	21.40	23.90
12P	23.40	25.90
13P	25.40	27.90
14P	27.40	29.90
15P	29.40	31.90

Unit: mm