
HDGC2014 Series 2.00mm (.079") Pitch Wire to Board Connector



Specifications


Current rating:2A AC,DC
Voltage rating:100V AC,DC
Temperature range:-25°C~+85°C
Contact resistance:10mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:800V AC/minute
Compliant with RoHS and REACH
Meet the HF/Halogen Free need to customize
Contact HDGC for details


HDGC2014 Series 2.00mm (.079") Pitch Wire to Board Connector


HDGC2014-T

2.00mm pitch Crimp Terminal

Reference Informations:
*Used in HDGC2014H-5P series Housing

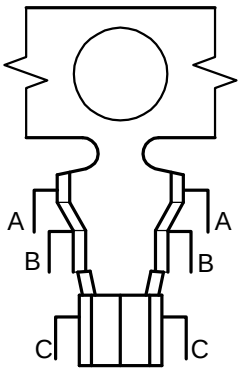

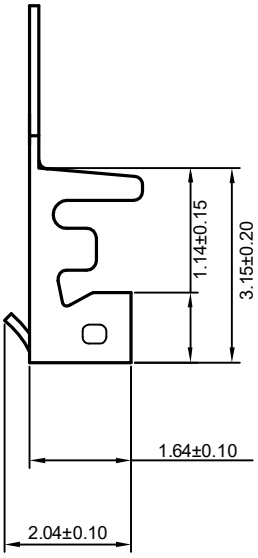

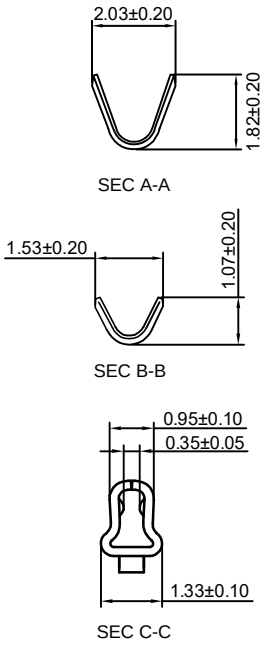

Ordering information & Specifications:

Unit:mm


Part NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
HDGC2014-TP	AWG#24-#30	1.50mm(max)	Phosphor Bronze	Tin over Nickel	15,000 PCS
HDGC2014-GP	AWG#24-#30	1.50mm(max)	Phosphor Bronze	Gold over Nickel	15,000 PCS


Optional Gold plating available but MOQ requested


HDGC2014H-5P


2.00mm pitch Housing


Reference Informations:
*Material:Nylon 66,UL94V-0
*Suitable HDGC2014-T series Terminal
*Color:Natural(white)

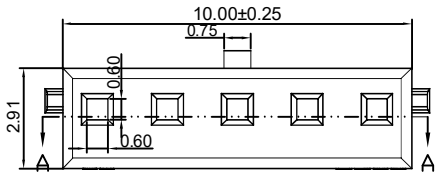



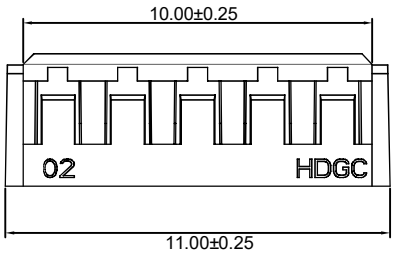



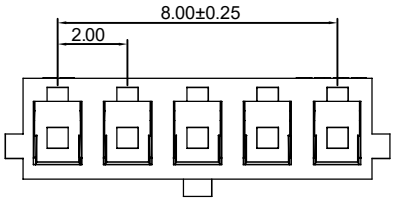

Ordering Information:
HDGC2014H-5P - *** (1 / 2)

1.Part No.
2.Material:
(blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750°C

Unit: mm