
HDGC5002 Series 5.00mm (.197") Pitch Wire to Board and Wire to Wire Connector



Specifications


Current rating:2A AC,DC
Voltage rating:100V AC,DC
Temperature range:-25°C~+85°C
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:800V AC/minute
Compliant with RoHS and REACH
Meet the HF/Halogen Free,GWT/Glow wire Test (IEC60335-1) request,need to customize
Contact HDGC for details

HDGC5002 Series 5.00mm (.197") Pitch Wire to Board and Wire to Wire Connector

HDGC5002-T

5.00mm pitch Crimp Terminal

Reference Informations:
*Used in HDGC5002 series Housing

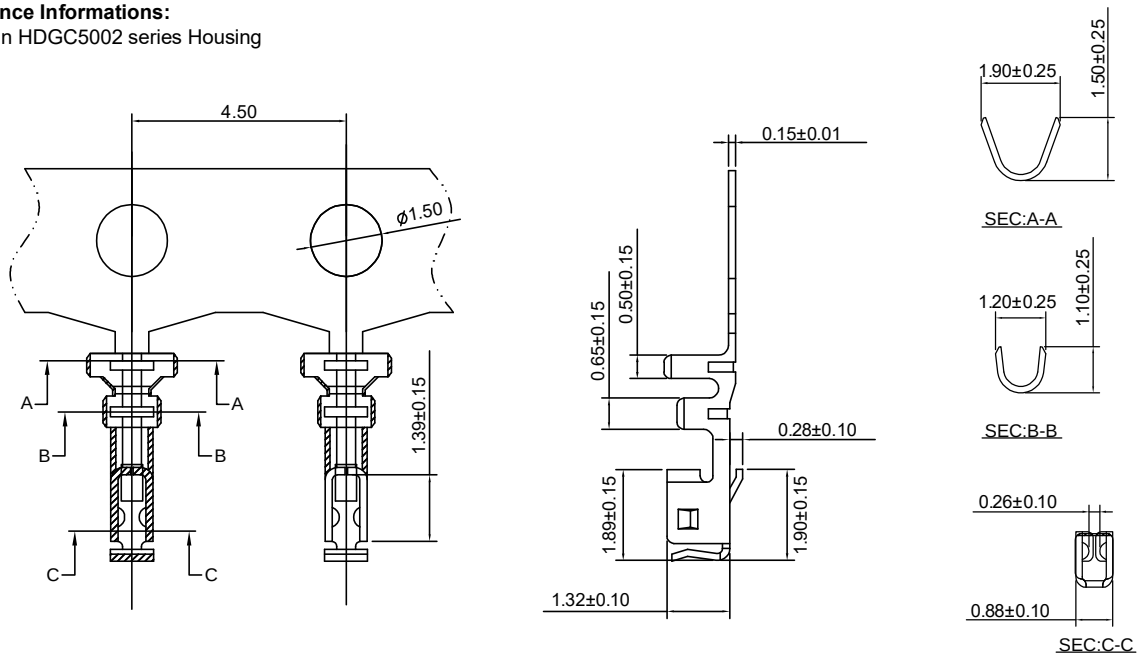

Unit:mm

Ordering information & Specifications:

Part NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
HDGC5002-TP	AWG#24-#30	1.50mm(max)	Phosphor Bronze	Tin over Nickel	20,000 PCS
HDGC5002-GP	AWG#24-#30	1.50mm(max)	Phosphor Bronze	Gold over Nickel	20,000 PCS


Optional Gold plating available but MOQ requested


HDGC5002H

5.00mm pitch Housing

Reference Informations:
*Material:Nylon 66,UL94V-0
*Suitable HDGC5002-T series Terminal
*Color:White

Ordering Information:
HDGC5002H- *** (1 / 2)
1.Part No.
2.Material:
(blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750°C



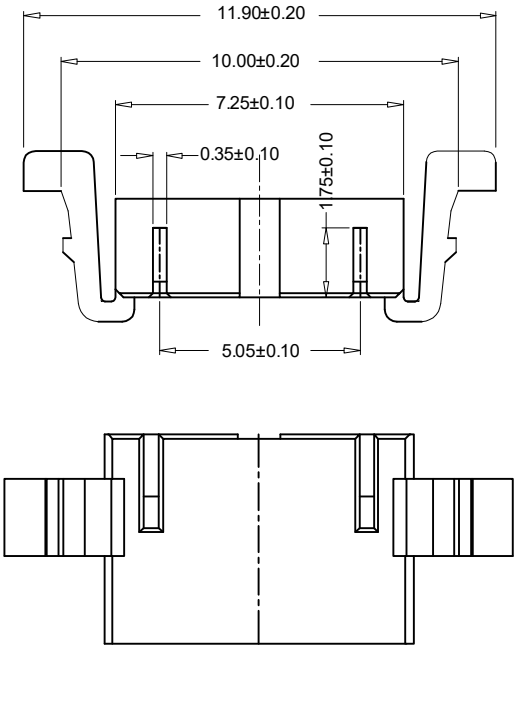

Unit: mm