
HDGC6525 Series 6.50mm (.256") Pitch Wire to Board and Wire to Wire Connector



Specifications


Current rating:3A AC,DC
Voltage rating:250V AC,DC
Temperature range:-25°C~+85°C
Contact resistance:10mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:800V AC/minute
Compliant with RoHS and REACH
Meet the HF/Halogen Free,GWT/Glow wire Test (IEC60335-1) request,need to customize
Contact HDGC for details

HDGC6525 Series 6.50mm (.256") Pitch Wire to Board and Wire to Wire Connector

HDGC6525-T

6.50mm pitch Crimp Terminal

Reference Informations:
*Used in HDGC6525 series Housing

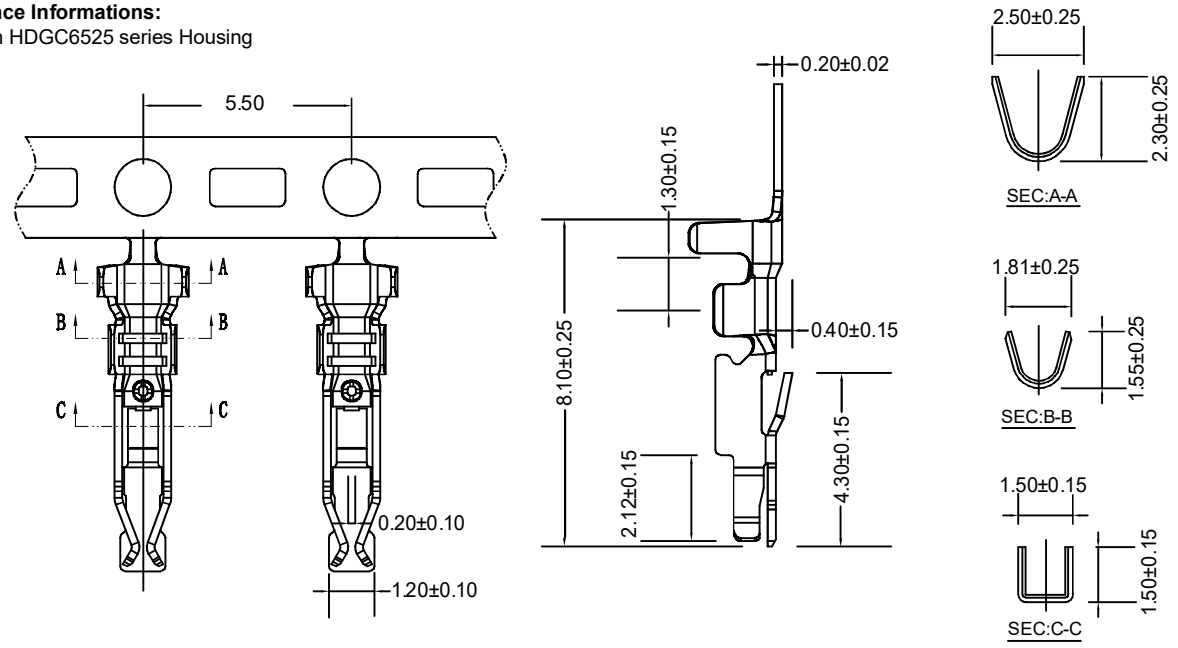

Ordering information & Specifications:

Unit:mm

Part NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
HDGC6525-TP	AWG#24-#28	1.60mm(max)	Phosphor Bronze	Tin over Nickel	15,000 PCS
HDGC6525-GP	AWG#24-#28	1.60mm(max)	Phosphor Bronze	Gold over Nickel	15,000 PCS


Optional Gold plating available but MOQ requested


HDGC6525H


6.50mm pitch Housing

Reference Informations:
*Material:Nylon 66,UL94V-0
*Suitable HDGC6525-T series Terminal
*Color:White

Ordering Information:
HDGC6525H- *** (1 / 2)
1.Part No.
2.Material:
(blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750°C



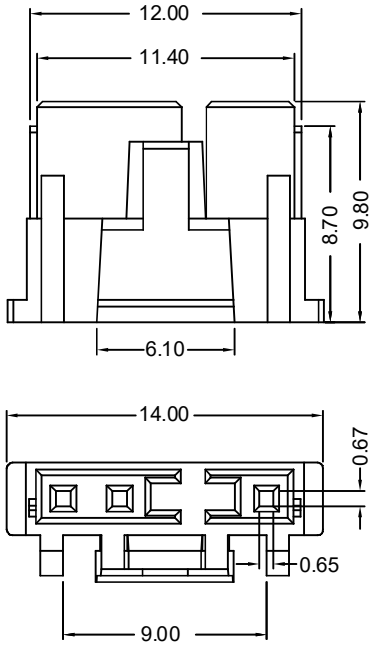

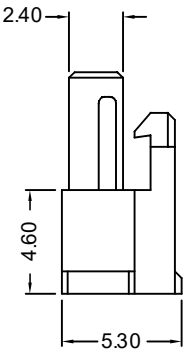

Unit: mm