


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2012-12-10

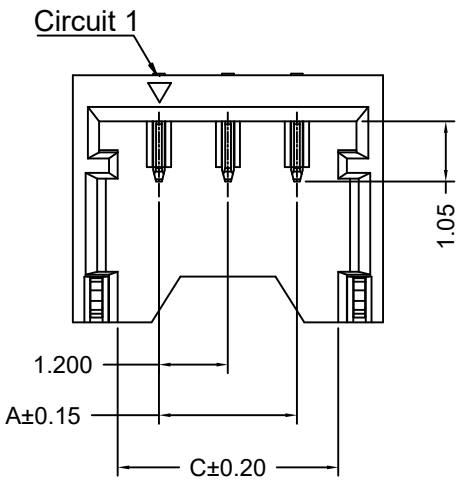


2-3 Pin
Without Sticking Point

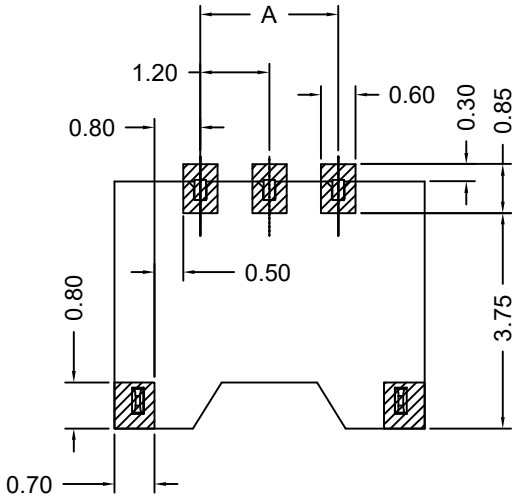


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05



3D View

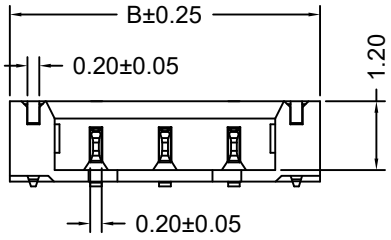

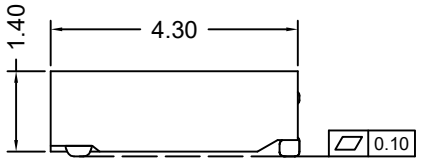

☐ **Specification**

Voltage Rating : 50V AC/DC
Current Rating : 2A AC/DC
Withstanding Voltage : 500V AC /minute
Insulation Resistance : ≥100MΩ min
Temperature Range : -40℃ to + 105℃
Contact Resistance : ≤20mΩ
After Environmental Testing: ≤40mΩ
Suitable Wire/Cable:AWG #28 to #30,OD:0.8mm max


1.Material(Insulators):PA4T,UL94V-0
2.Color:Natural / Black
3.Material(Pin):Phosphor Bronze
4.Plating :Tin/Gold
5.Package:Tape&Reel,SPQ:4K/reel prefered

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	1.20	4.20	2.64	03	2.40	5.40	3.84


深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表								
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	TITLE: 产品名称：	1.20mm Pitch 90 ° Wafer	
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	PART NO: 产品编号：	HDGC1202WR-S-XP	
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	DATE	SCALE	UNIT / CODE NUMBER
						2012-12-10	1:1	mm / A096


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNA TURE	日期 DATE
A0		NEW RELEEASE	WANG	2012-12-10

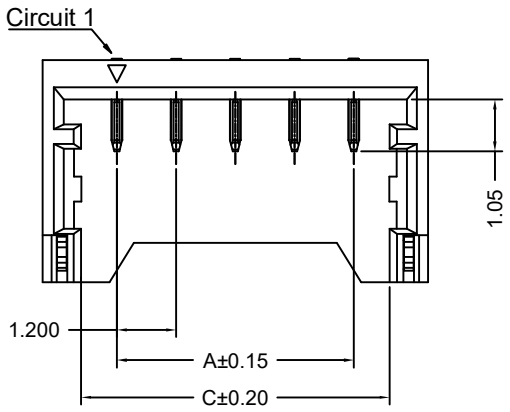


4-5Pin
Without Sticking Point

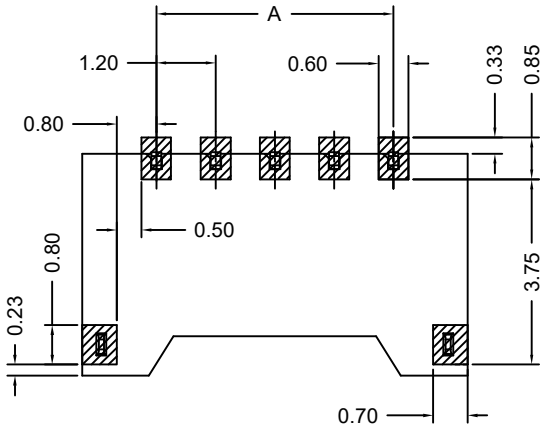



RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05



3D View




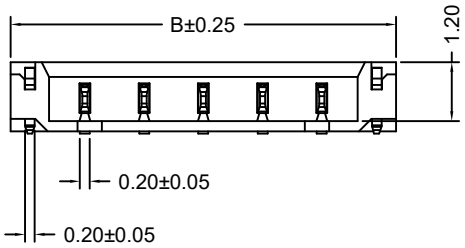

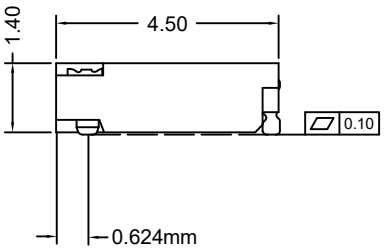


Specification
Voltage Rating : 50V AC/DC
Current Rating : 2A AC/DC
Withstanding Voltage : 500V AC /minute
Insulation Resistance : ≥100MΩ min
Temperature Range : 40℃ to + 105℃
Contact Resistance : ≤20mΩ
After Environmental Testing: ≤40mΩ
Suitable Wire/Cable:AWG #28 to #30,OD:0.8mm max

1.Material(Insulators):PA4T,UL94V-0
2.Color:Natural / Black
3.Material(Pin):Phosphor Bronze
4.Plating :Tin/Gold
5.Package:Tape&Reel,SPQ:4K/reel prefered



6P With Sticking Point
Scale 1:1



7~10P With Sticking Point
Scale 1:1
Furthermore be able to 11P,12P

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
04	3.60	6.60	5.04	08	8.40	11.40	9.84
05	4.80	7.80	6.24	09	9.60	12.60	11.04
06	6.00	9.00	7.44	10	10.80	13.80	12.24
07	7.20	10.20	8.64				

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL：0755-27129737 FAX：0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表								
X.X	±0.30	X.X°	±3°	APPD: 核准：	XIE	PART NO: 产品编号：	HDGC1202WR-S-XP	
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：	WANG	2012-12-10	1:1	mm	A096

TITLE: 产品名称： 1.20mm Pitch 90° Wafer