
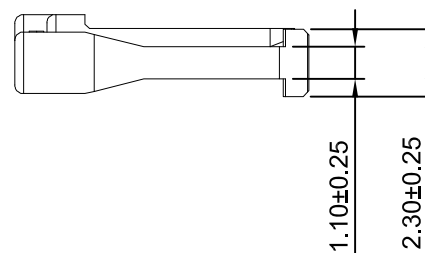
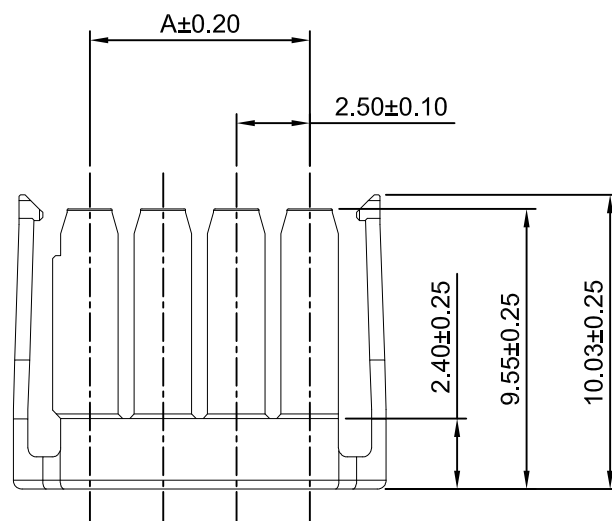


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2019-06-22

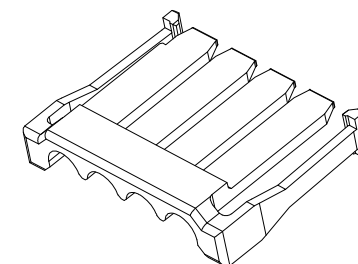

Ordering Information:

HDGC2509SA-XP - ***
1 2

1.Part No.

2.Color:

(Blank);Black

NAT:Natural

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max


Insulation Resistance: 1000MΩ Min


Withstanding Voltage:1000VAC/minute

Material: PA4T,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	7.70	6P	12.50	17.70
3P	5.00	10.20	7P	15.00	20.20
4P	7.50	12.70	8P	17.50	22.70
5P	10.00	15.20	----	----	----

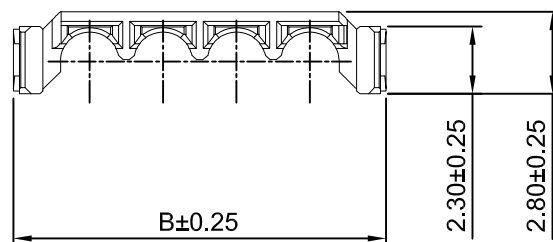

		深 圳 市 华 德 共 创 科 技 有 限 公 司							
Shenzhen Huade co-create Technology Co.,LTD									
TEL : 0755-27129737					FAX : 0755-29940187				
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称：2.50mm Pitch Seal			
X.X	±0.30	X.X°	±3°	APPD: 核准：XIE		PART NO: 产品编号：HDGC2509SA-XP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对：WANG		DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图：WANG		2019-06-22	4:1	mm	A008